

UN/CEFACT – ITSC-PDA/Buy BRS Cross Industry Scheduling – P1096

UNITED NATIONS
CENTRE FOR TRADE FACILITATION AND ELECTRONIC BUSINESS
(UN/CEFACT)

INTERNATIONAL SUPPLY CHAIN PROGRAMME DEVELOPMENT AREA
SUPPLY CHAIN & PROCUREMENT DOMAIN

BUSINESS REQUIREMENTS SPECIFICATION
(BRS)
CROSS INDUSTRY SCHEDULING PROCESS

SOURCE: Automotive Project Team
ACTION: For public review
DATE: 8 June 2021
STATUS: Draft 3.0

Disclaimer (Updated UN/CEFACT Intellectual Property Rights Policy – ECE/TRADE/C/CEFACT/ 2010/20/Rev.2)

ECE draws attention to the possibility that the practice or implementation of its outputs (which include but are not limited to Recommendations, norms, standards, guidelines and technical specifications) may involve the use of a claimed intellectual property right.

Each output is based on the contributions of participants in the UN/CEFACT process, who have agreed to waive enforcement of their intellectual property rights pursuant to the UN/CEFACT IPR Policy (document ECE/TRADE/C/CEFACT/2010/20/Rev.2 available at http://www.unecce.org/cefact/cf_docs.html or from the ECE secretariat). ECE takes no position concerning the evidence, validity or applicability of any claimed intellectual property right or any other right that might be claimed by any third parties related to the implementation of its outputs. ECE makes no representation that it has made any investigation or effort to evaluate any such rights.

Implementers of UN/CEFACT outputs are cautioned that any third-party intellectual property rights claims related to their use of a UN/CEFACT output will be their responsibility and are urged to ensure that their use of UN/CEFACT outputs does not infringe on an intellectual property right of a third party.

ECE does not accept any liability for any possible infringement of a claimed intellectual property right or any other right that might be claimed to relate to the implementation of any of its outputs.

8
9**Document Summary**

Document Item	Current Value
Document Title	Business Requirements Specification Cross Industry Scheduling Process v3.0
Date Last Modified	2021-03-12
Current Document Issue	Version 3.0 Release 1.0
Status	Draft
Document Description (one sentence summary)	This BRS details the requirements for the Scheduling processes. The scheduling process supports various demand and supply modes, such as Kanban, Synchronized, MRP and VMI.

10
11
12**Log of Changes**

Version	Date of Change	Paragraphs changed	Summary of Change
	25 June 2008	Various	Added detail to use cases and clarified/added business requirements to business entity relationships. Minor edits for formatting and grammar.
1.00.07	4. September 2008	Various	Minor editorial changes on the template.
1.00.08	13 September 2008	5.1 & 5.2	Restructured the use cases based on the feedback from TBG14.
1.00.09	27 October 2008	5.1 & 5.2	Minor change on figures 5-2 and 5-15 based on the remarks from TBG14.
1.00.10	27 September 2016	5.1 & 5.2 Add 5.3.6	Minor change on figures 5-2 and 5-15 based on the remarks from TBG14. Add Information Model for Consumption Report.
v2.0 rel1.0	11 May 2017	Change 5.1.1.2 Change 5.3.4	Generalize the definition of KANBAN and Add the information model for Logistics Identification Tag.
V3.0 rel1.0	12 March 2021	Change 5.3.1 Change 5.3.4	Addition of global automotive requirements to the information model definitions for Demand Forecast and Supply Instruction.

13

TABLE OF CONTENTS

14		
15		
16		
17		
18	1. Preamble	4
19	2. References	4
20	3. Objective	4
21	4. Scope	5
22	5. Business Requirements	6
23	5.1. Business Process Elaboration	6
24	5.1.1. Customer controlled supply	7
25	5.1.1.1. Coordinated Supply scenario	7
26	5.1.1.2. KANBAN scenario	9
27	5.1.1.3. Synchronized scenario	11
28	5.1.2. Supplier Controlled Supply	13
29	5.1.2.1. VMI Scenario and Consigned VMI Scenario	14
30	5.2. Information Flow Definition	19
31	5.2.1. Demand Forecast (Business Transaction)	19
32	5.2.2. Supply Instruction (Business Transaction)	21
33	5.2.3. Supply Notification (Business Transaction)	22
34	5.2.4. Inventory Forecast (Business Transaction)	24
35	5.2.5. Consumption Report	26
36	5.3. Information Model Definition	28
37	5.3.1. Demand Forecast (DFO)	28
38	5.3.2. Demand Forecast Response (DFR)	35
39	5.3.3. Inventory Forecast (IFO)	40
40	5.3.4. Supply Instruction (SPI)	45
41	5.3.5. Supply Notification (SPN)	50
42	5.3.6. Consumption Report (CR)	54
43	5.4. Business Rules	60
44	5.5. Definition of Terms	60
45		

46

47

1. Preamble

48

49

50

The current practice of the exchange of business documents by means of telecommunications – usually defined as e-Business presents a major opportunity to improve the competitiveness of companies, especially for Small and Medium Enterprises (SME).

51

52

53

54

Started as an initiative by CEN/ISSS Workshop eBES, the European Expert Group 1 (EEG1) – SupplyChain & e-Procurement developed the Cross Industry Scheduling Process in 2006. The Cross Industry Scheduling Process has been compiled with contributions and submissions from: EUROFER, BoostAero, EDIFRANCE, Odette, GS1, UN/CEFACT TBG12.

55

56

57

TBG1 has drafted the BRS for further processing through the UN/CEFACT Forum process with the goal of developing the UN/CEFACT ebXML standard messages for the transactions of the scheduling process.

58

59

60

61

The purpose of this document is to define globally consistent scheduling processes for worldwide supply chains, using the UN/CEFACT Modelling Methodology (UMM) approach and Unified Modelling Language to describe and detail the business processes and transactions involved.

62

63

64

65

The structure of this document is based on the structure of the UN/CEFACT Business Requirements Specification (BRS) document reference CEFAC/ICG/005.

66

2. References

67

68

69

70

71

72

73

74

75

- UN/CEFACT TBG1 Common Supply Chain BRS, Release 1
- UN/CEFACT TBG2 Buy-Ship-Pay (Including UNeDocs) BRS, version 1.0
- UN/CEFACT Modeling Methodology (CEFACT/TMG/N090R10, November 2001)
- UN/CEFACT Business Requirements Specification version 1.5 (CEFACT/ICG/005)
- Business Requirement Specification – Document Template v2.0.1 (May 2012)
- BRS_ Cross Industry Scheduling Process v1.0.9 (September 2008)
- UN/EDIFACT – Delivery Schedule and Delivery JIT messages

76

3. Objective

77

78

79

The objective of this document is to standardise the business processes, the business transactions and the information entities of the exchange of data used by industries in the scheduling processes of supply chain.

80

81

82

The business process is the detailed description of the way trading partners intend to play their respective roles, establish business relationships and share responsibilities to interact efficiently with the support of their respective information systems.

83

84

85

Each Business transaction is realised by an exchange of Business documents (also called messages). The sequence in which these documents are used, composes a particular instance of a scenario and are presented as activity diagrams in the document.

86

87

88


89

The business documents are composed of Business Information Entities (BIE), which are preferably taken from libraries of reusable business information entities. The contents of the business documents and the Business Information Entities are presented using class diagrams and/or requirement lists.

90
91
92
93
94

4. Scope

This BRS details the requirements for the Scheduling processes. The scheduling process supports various demand and supply modes, such as Kanban, Synchronized, MRP and VMI.

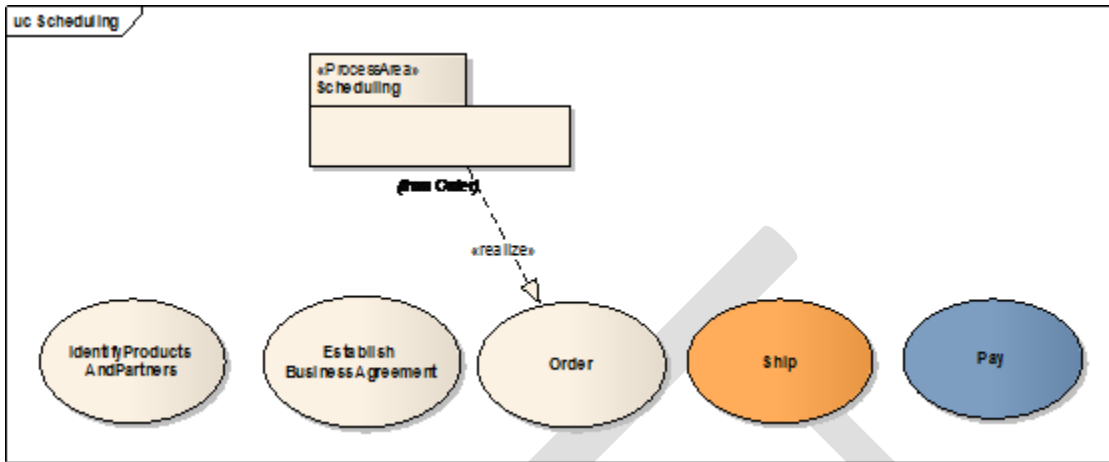

4-1 Positioning Cross Industry Scheduling within BUY-SHIP-PAY Process Model

95
96
97
98

Categories	Description and Values
Business Process	BUY-SHIP-PAY/Procurement&Sales/Order/Scheduling
Product Classification	All
Industry Classification	All
Geopolitical	All
Official Constraint	None
Business Process Role	Customer, Supplier
Supporting Role	ShipFrom, ShipTo, Buyer, Seller
System Capabilities	All

99

100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122

5. Business Requirements

5.1. Business Process Elaboration

The Customer and the Supplier should agree the contractual conditions (commercial, logistic, financial, etc.) prior to initiating the scheduling processes. The circumstances in which the scheduling processes are used and the interaction between the processes, need to be clearly defined between the Customer and the Supplier.

The scheduling processes are used in combination with a Contract or a Purchase Order. The Contractor Purchase Order is used to specify titles, rights, commitments, obligations and the product specification for the requested product and if applicable the terms of delivery and the delivery locations. To control the supply of the goods, the information given in the Contract or Purchase Order must be supplemented with the supply information, such as delivery time(s) and quantities and, if necessary, terms of delivery and delivery locations.

Scheduling includes the following high level business processes:

- Customer controlled supply, covering the Coordinated Supply, KANBAN and SynchronizedSupply scenarios.
- Supplier controlled supply, covering the VMI scenario.

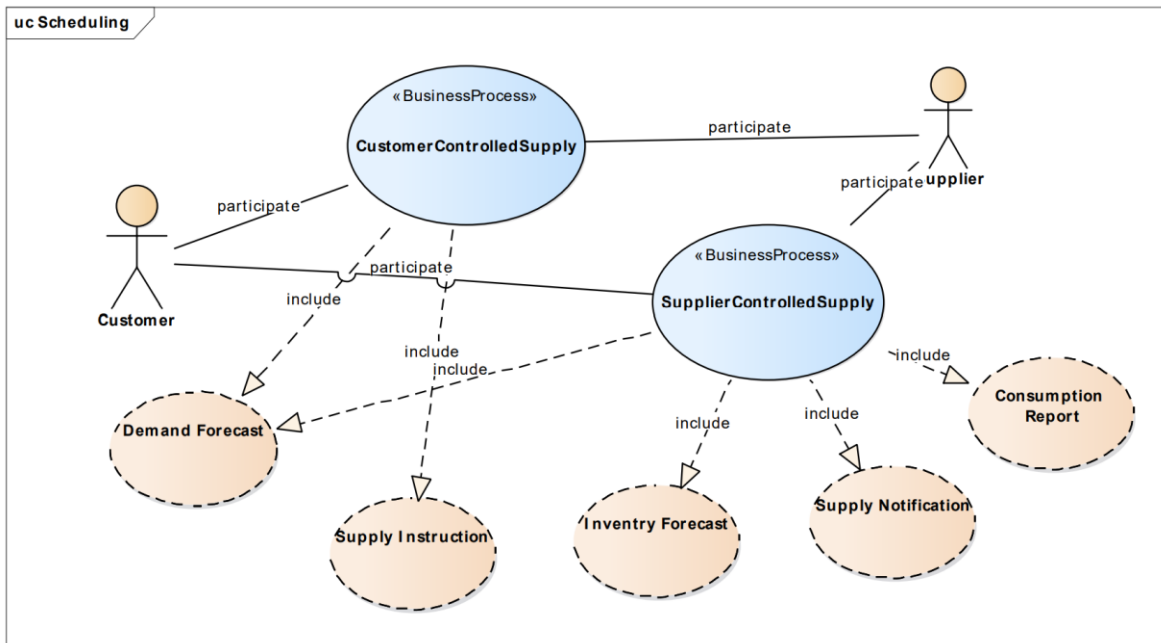


Figure 5-1 Business process overview

123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144

5.1.1. Customer controlled supply

The Customer controlled supply scheduling cycle is divided in two subprocesses:

1. Demand Forecasting

This process is initiated by the Customer and covers the exchange of information for forecasted requirements and possibly short-term firm requirements. In the Customer controlled supply process forecasted requirements are often netted against Customer inventory levels in order to more accurately reflect the quantities that may be required.

2. Supply Instruction


The Supply Instruction process is initiated by the Customer and covers the exchange of information for short term firm requirements and is used to authorize the delivery of goods.

- ✓ **Note:** In some cases, the Demand Forecast may include short-term firm requirements.
- ✓ **Note:** In some cases, the Supply Instruction may be used without a previous Demand Forecast.

5.1.1.1. Coordinated Supply scenario


In this scenario, the Demand Forecast is normally used because the supplier needs visibility on the forecast to be able to have the goods available for despatch.

The actual needs come from the Customer MRP (Material Resource Planning) system and are sent to the supplier with the Supply Instruction message.

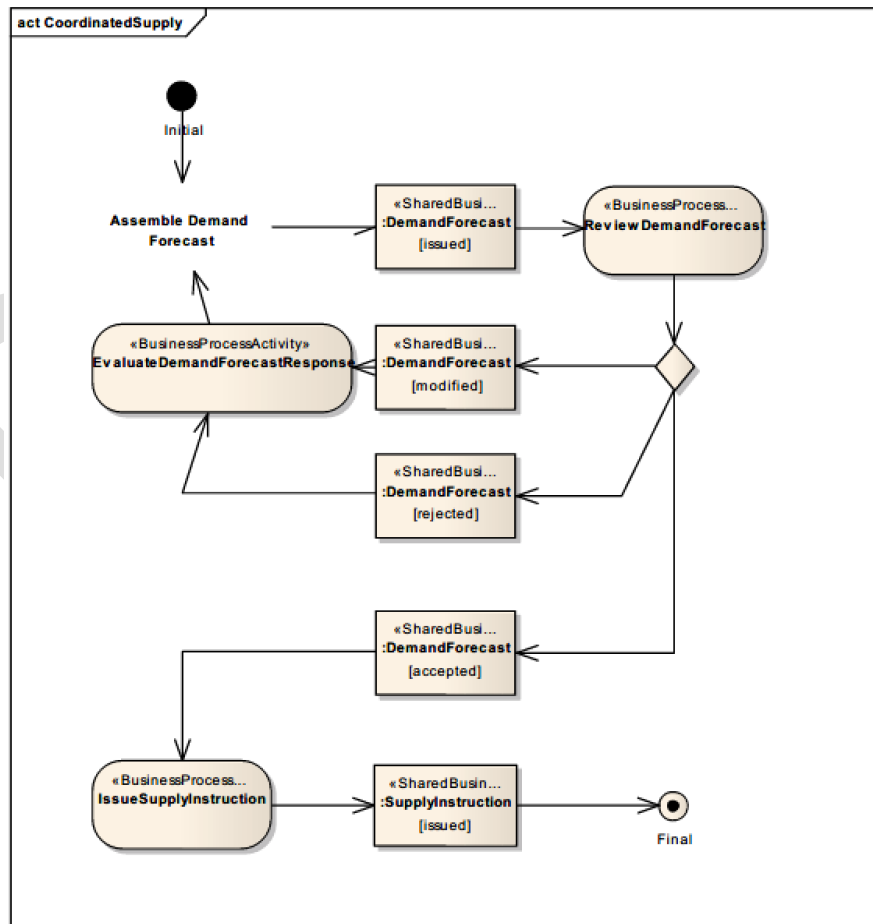


145
146
147

Figure 5-2 Business Process Activity Diagram

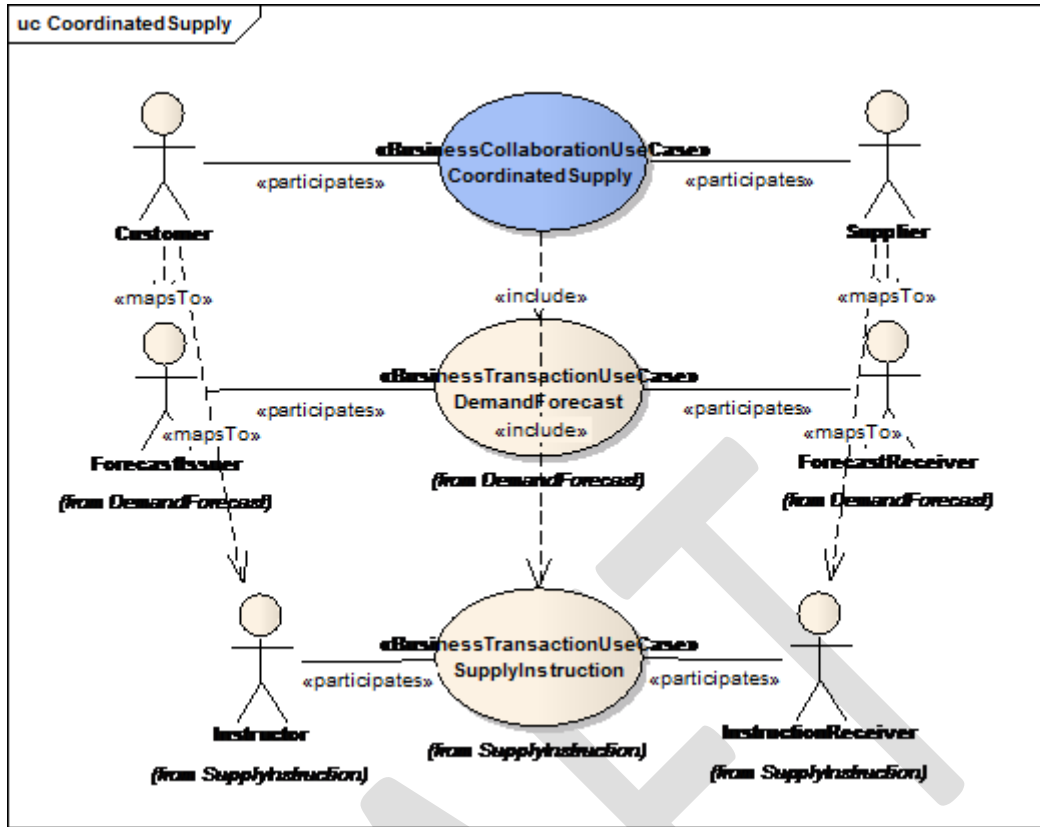

148
149
150

Figure 5-3 Business Collaboration Use Case Diagram

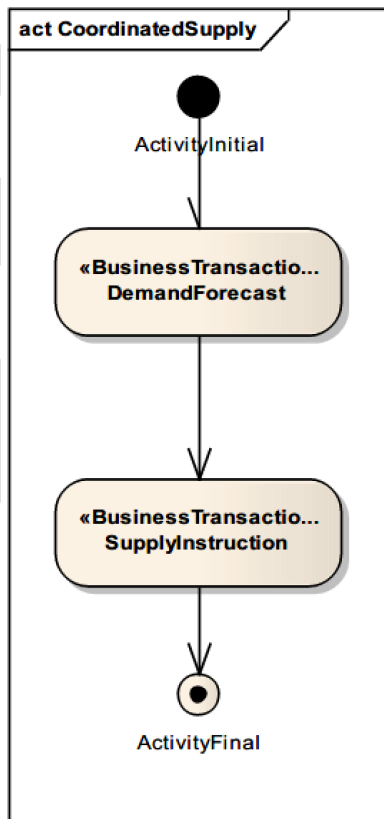

151
152
153
154
155

Figure 5-4 Business Collaboration Protocol - Activity Diagram

156
157
158
159
160
161
162
163
164
165


5.1.1.2. KANBAN scenario

In this scenario the Demand Forecast is not necessarily required, especially when the usage is fairly constant.

When materials or parts in a logistics container (such as a box) are consumed, the customer sends a KANBAN signal via the supply instruction message. When the supplier receives the supply instruction, he will prepare the despatch of a full box to replace the empty one.


As is possible in the other scenarios (synchronous, SCC (Supply Chain Collaboration), ...), the Supply Instruction could include a logistic identification tag (also called a Kanban).

The supplier will prepare a logistics identification tag according to the information received and the tag will be attached to the logistics container during preparation of the shipment.

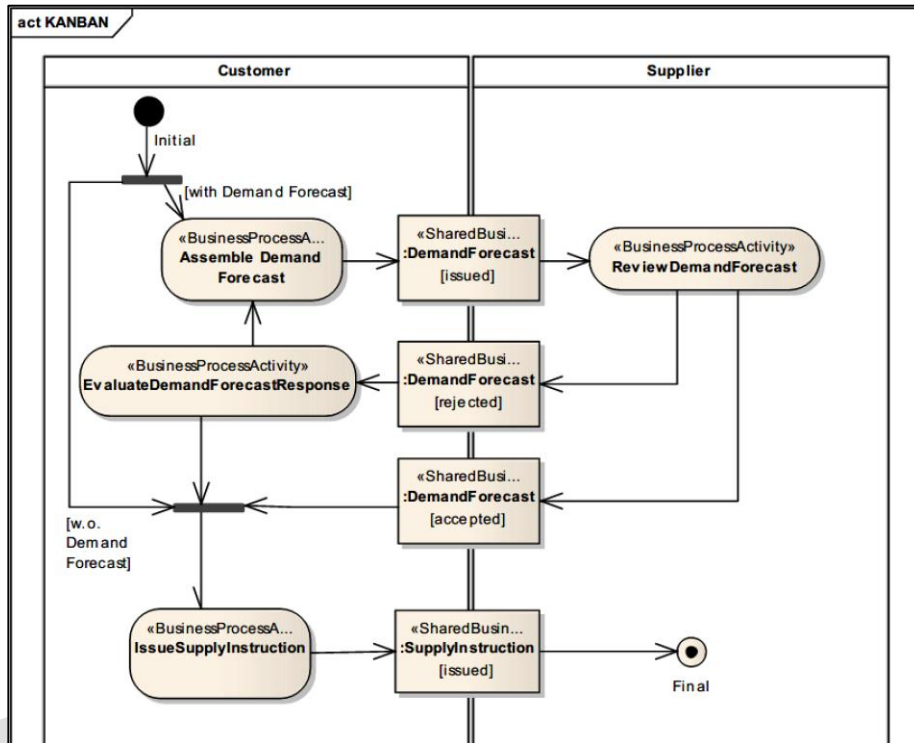

166
167


Figure 5-5 Business Process Activity Diagram

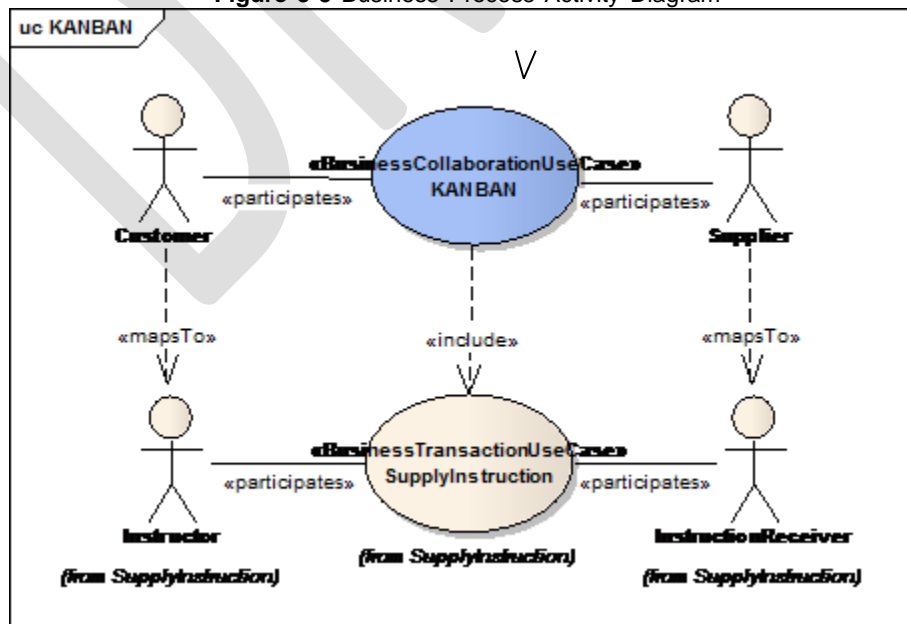

168
169
170
171

Figure 5-6 Business Collaboration Use Case Diagram

172

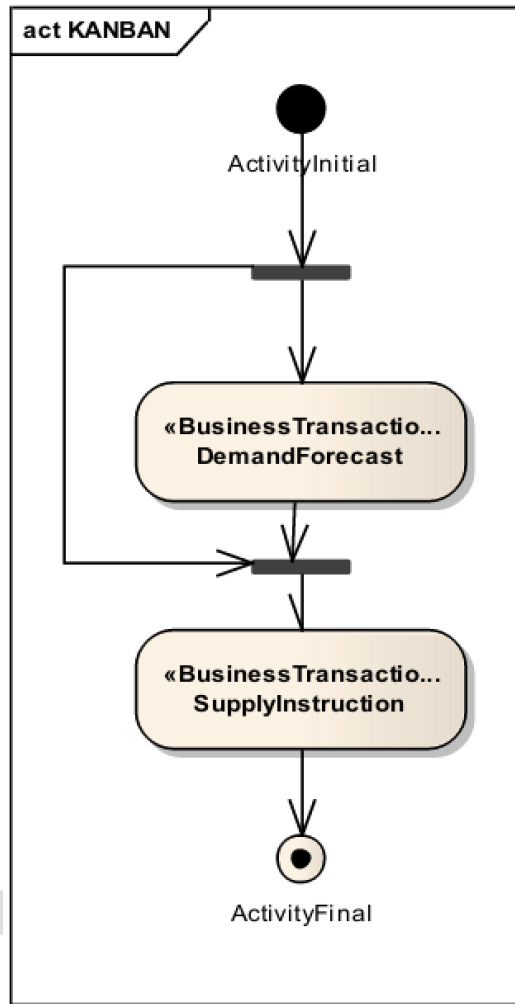

173
174

Figure 5-7 Business Collaboration Protocol - Activity Diagram


175
176
177
178
179
180
181
182
183
184
185

5.1.1.3. Synchronized scenario

In this scenario, the Demand Forecast is always used because the supplier needs visibility on the forecast to be able to have the goods available for despatch. It applies, for example, to goods which are too volatile/voluminous/complex/product specific to hold in stock or which have a long lead time to order.


This scenario is used to have a particular part available at the right time for a specific product going down the production line.

The needs come from the Customer MRP system and are sent to the supplier in the Supply Instruction process.

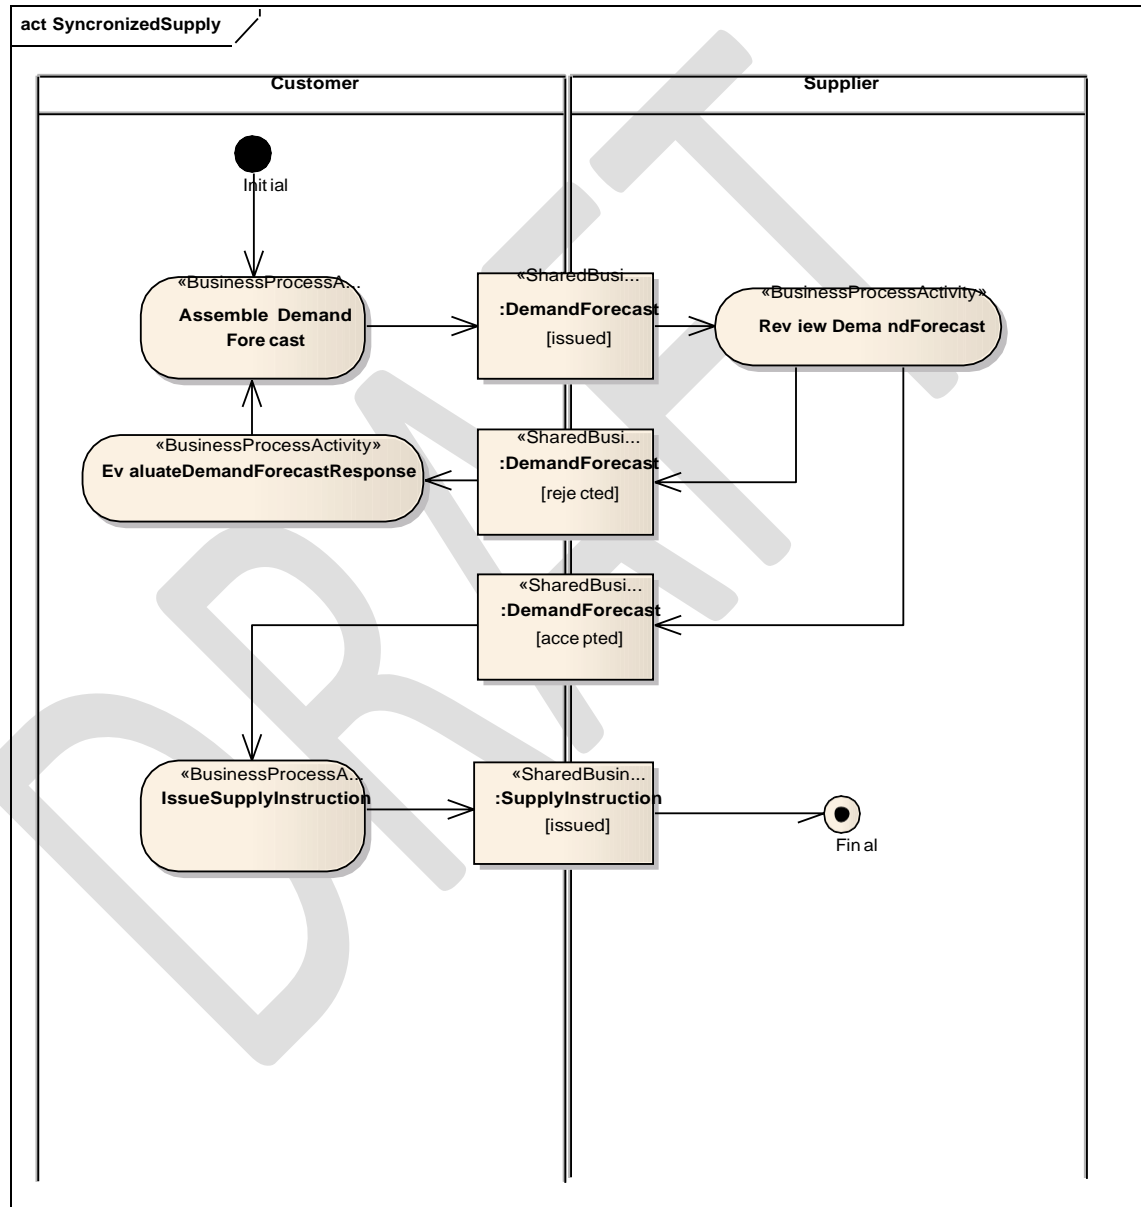


186
187

Figure 5-8 Business Process Activity Diagram

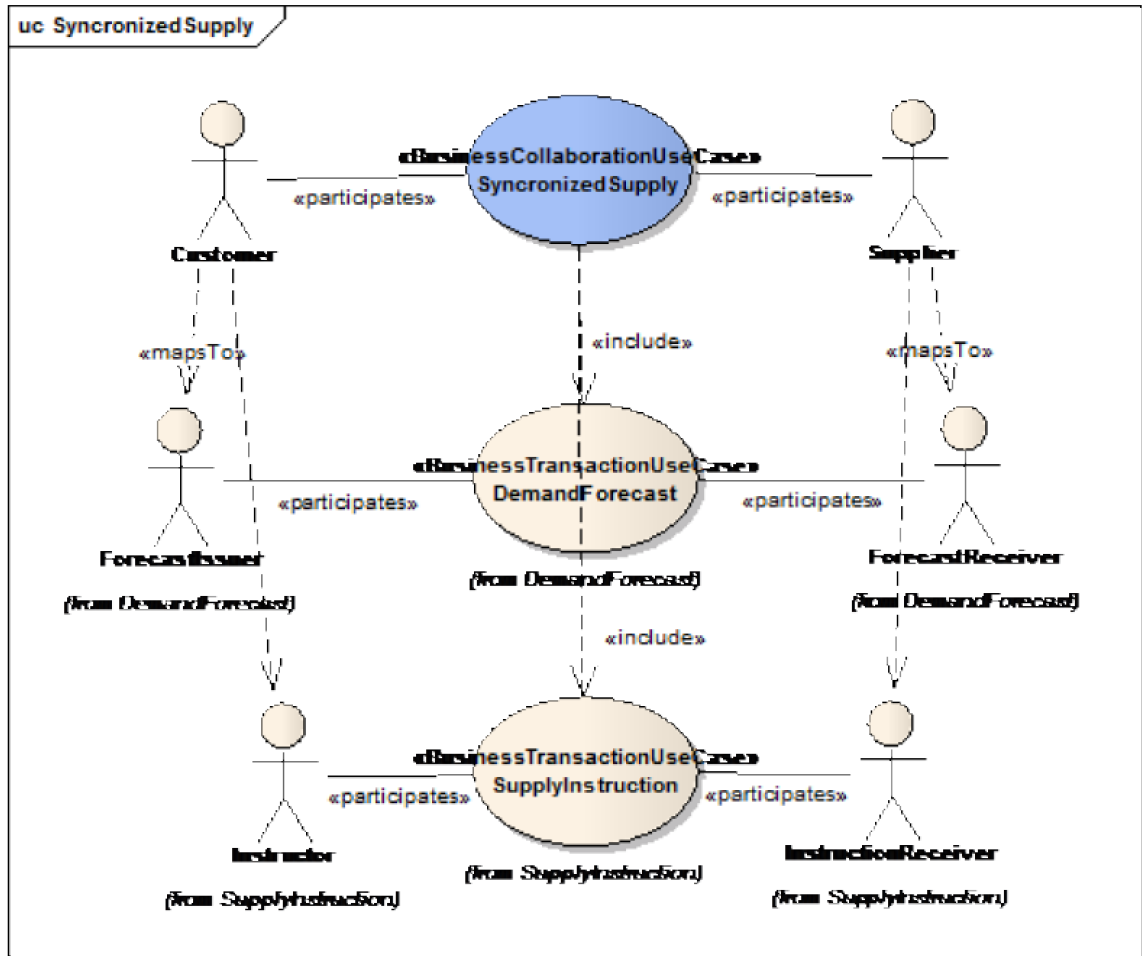

188
189
190

Figure 5-9 Business Collaboration Use Case Diagram

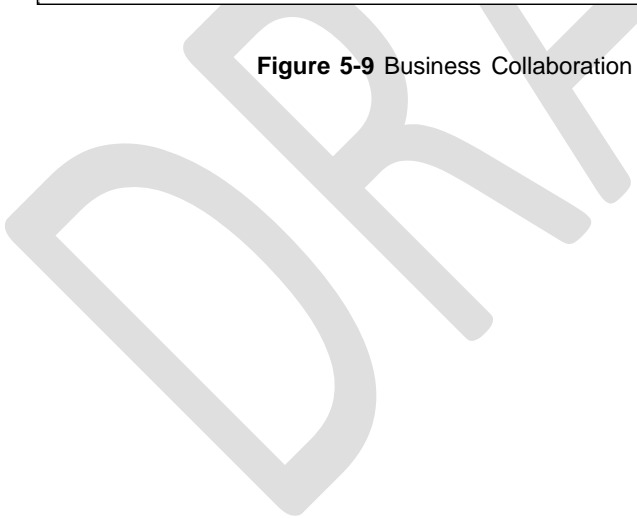

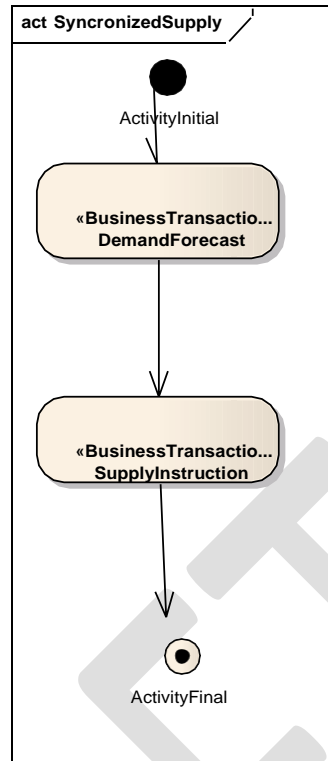


Figure 5-10 Business Collaboration Protocol - Activity Diagram

191
192
193
194
195

5.1.2. Supplier Controlled Supply

196
197
198
199

The Supplier controlled supply scheduling cycle can include up to four subprocesses:

1. - Demand Forecasting

200
201
202
203
204
205

This process is initiated by the Customer and covers the exchange of information for forecasted requirements and anticipated demand for products. In the Supplier controlled supply process forecasted requirements are usually not netted against Customer inventory levels.

2. - Inventory Forecasting

206
207
208
209
210

This process is initiated by the Customer and covers the exchange of information for forecasted inventory. The supplier uses the inventory forecast to plan his future deliveries.

3. - Supply Notification

211
212
213
214
215

This process is initiated by the Supplier and covers the exchange of information on delivery plans and stock computations. This process is used to compute total inventory requirements as materials may already be in process in the logistics pipeline.

4. – Consumption Report

216
217
218
219
220

This process is initiated by the Customer and covers the exchange of information related to the consumption of material or parts from the inventory. This process is used by the supplier to build the invoice and to compute the current stock level.

221
222
223



Note: Supplier controlled supply can be used regardless of whether the inventory is under the ownership of the Customer or of the Supplier (consignment stock).

224

5.1.2.1. VMI Scenario and Consigned VMI Scenario

225
226
227
228

Vendor Managed Inventory (VMI) is a concept and process based upon a tight collaboration between Customer and Supplier whereby the Supplier (rather than the Customer) manages the inventory needed for the Customers manufacturing or trading process.

229
230
231
232
233

The supplier is required to maintain the inventory within a pre-defined and mutually agreed min/max range of inventory level. The supplier is free (according to the agreement) to deliver any quantity at any time provided that the inventory is kept within these indicated ranges. These ranges may be updated from time to time within limits defined in the contract between Customer and Supplier.

234
235
236

2 options are possible:

237

- VMI scenario: the inventory is under the ownership of the Customer.

238

- Consigned VMI scenario: the inventory is under the ownership of the Supplier.

239

240

241



Note: The Consumption Report will be used in the Consigned VMI scenario

242

243

244


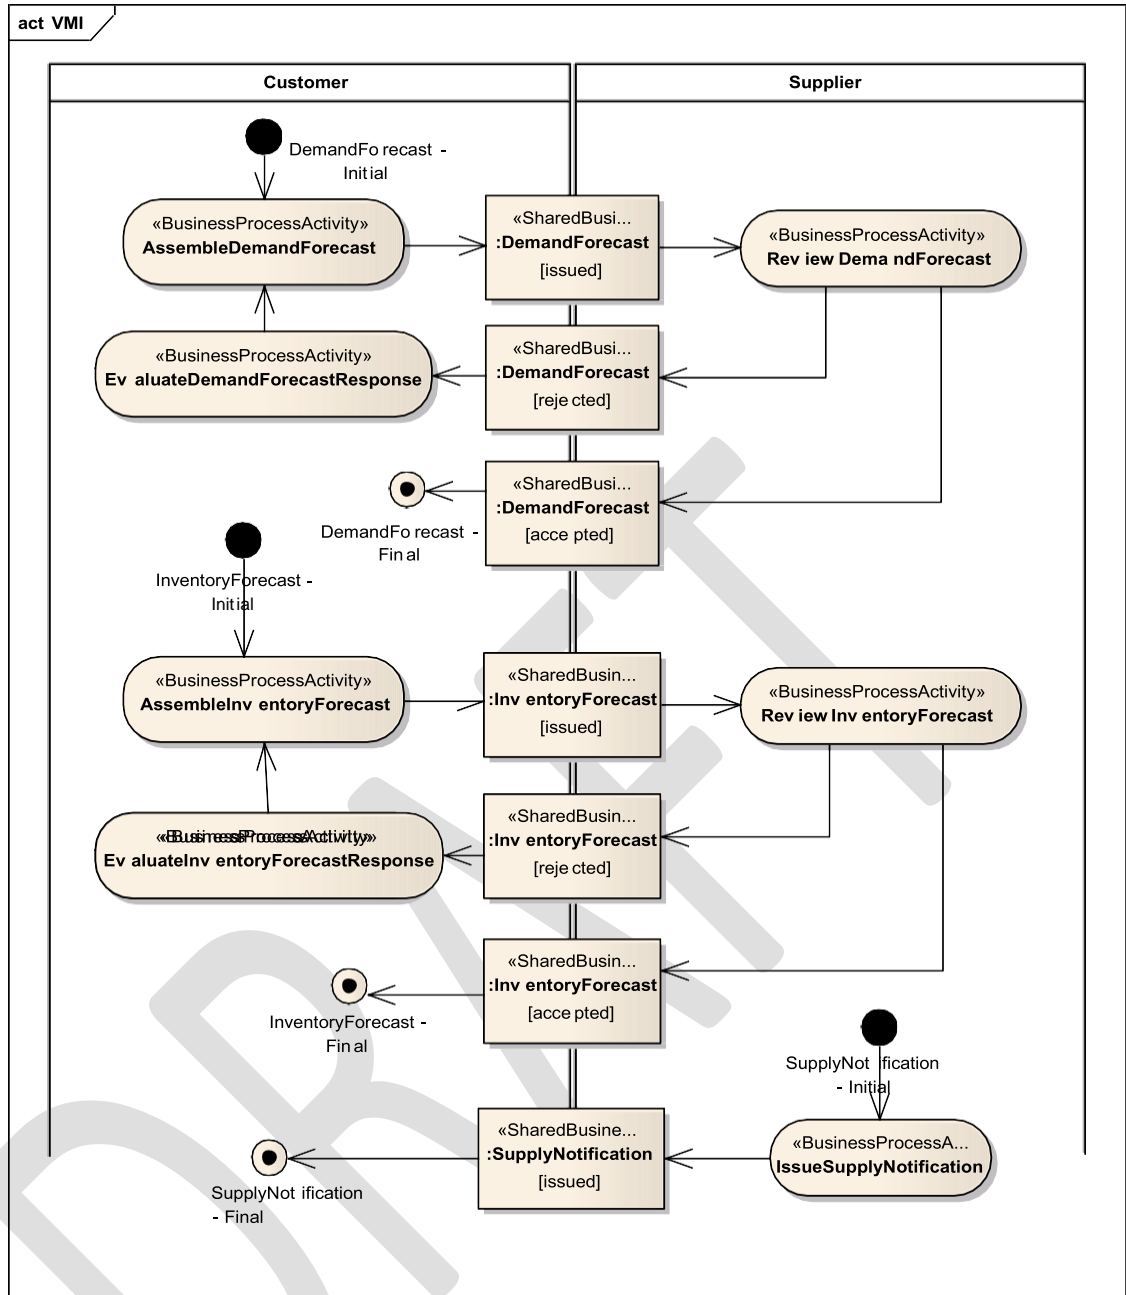



Figure 5-11 Business Process Activity Diagram

245
246
247



248

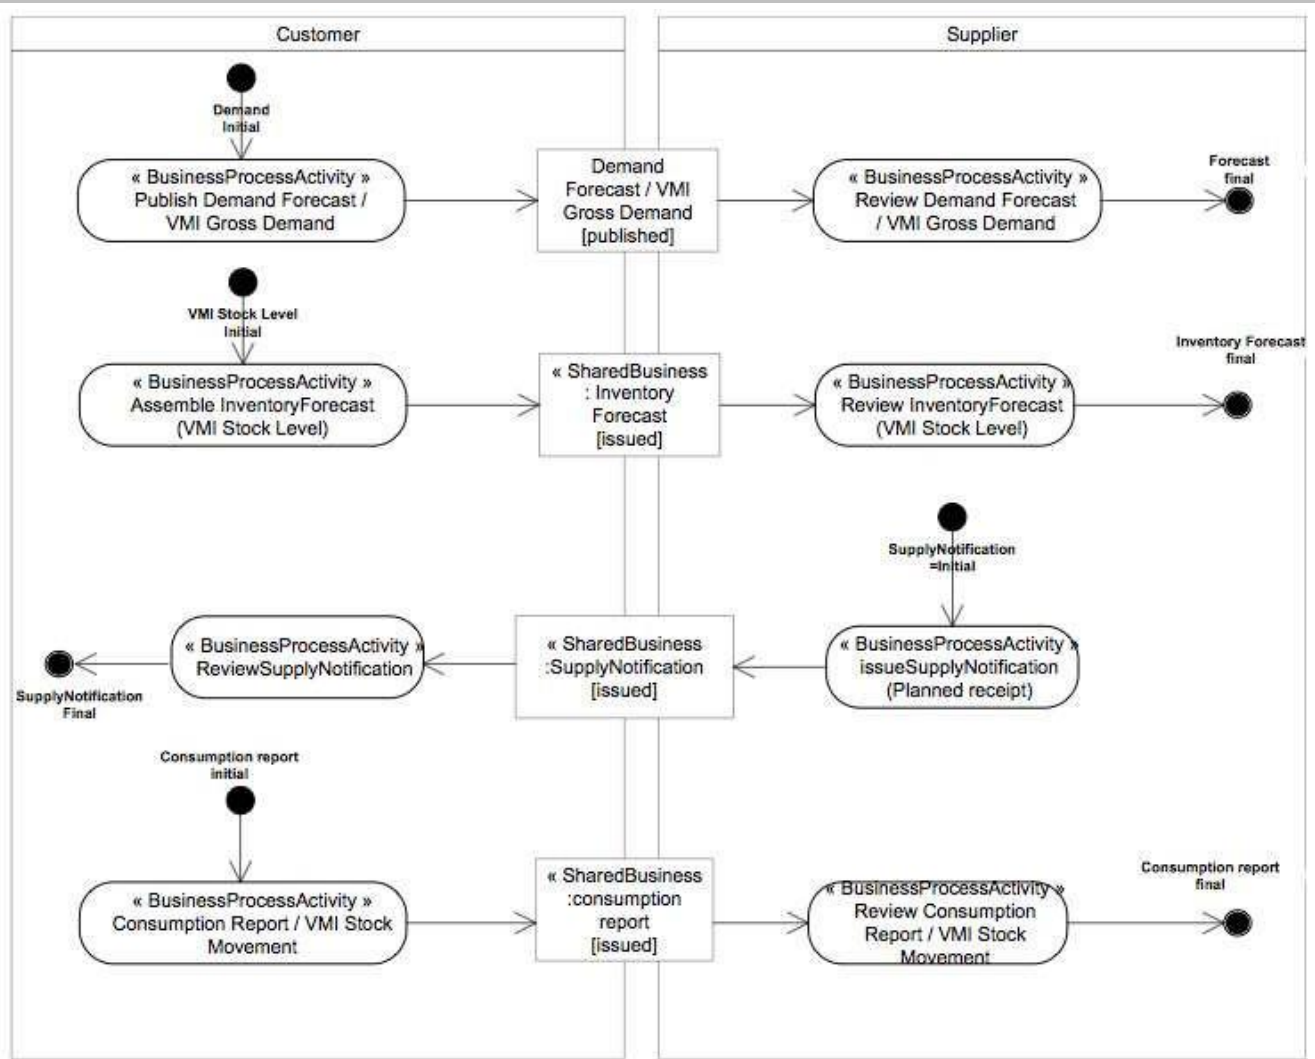

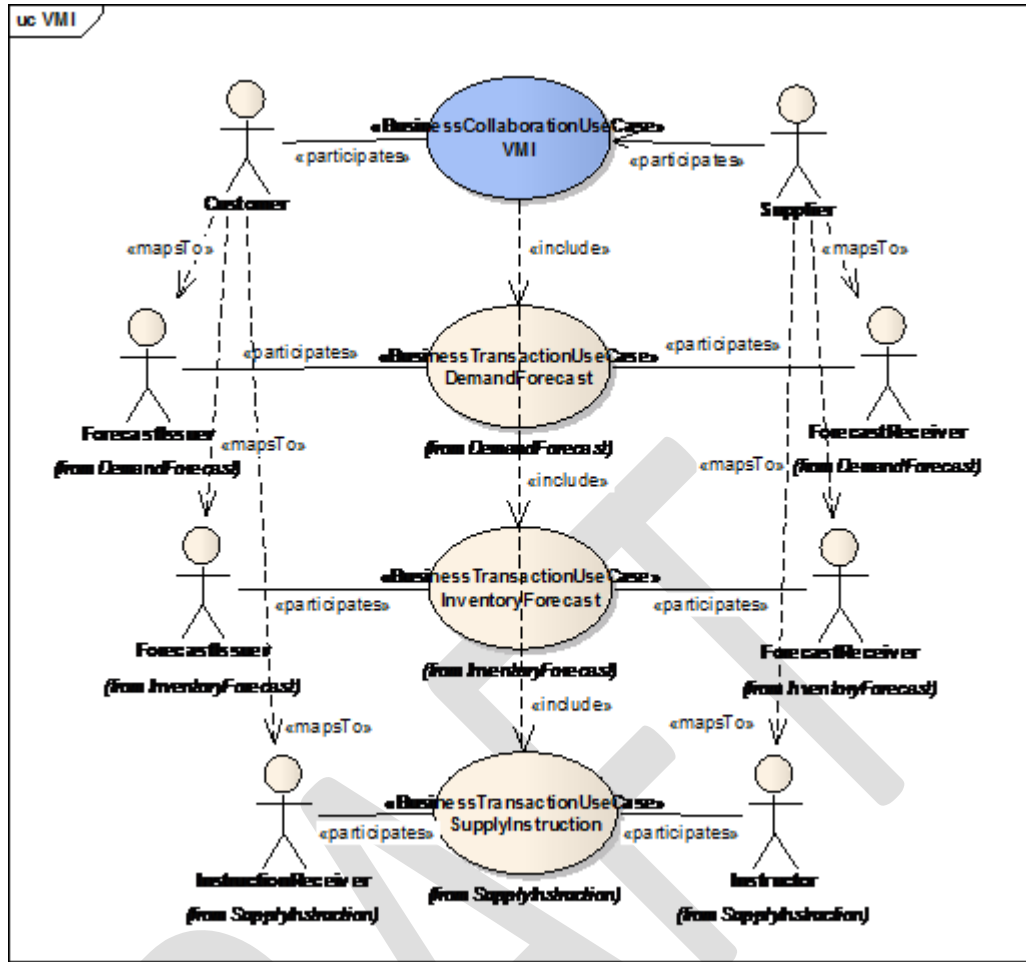

249
250
251

Figure 5-12 Business Collaboration Use Case Diagram

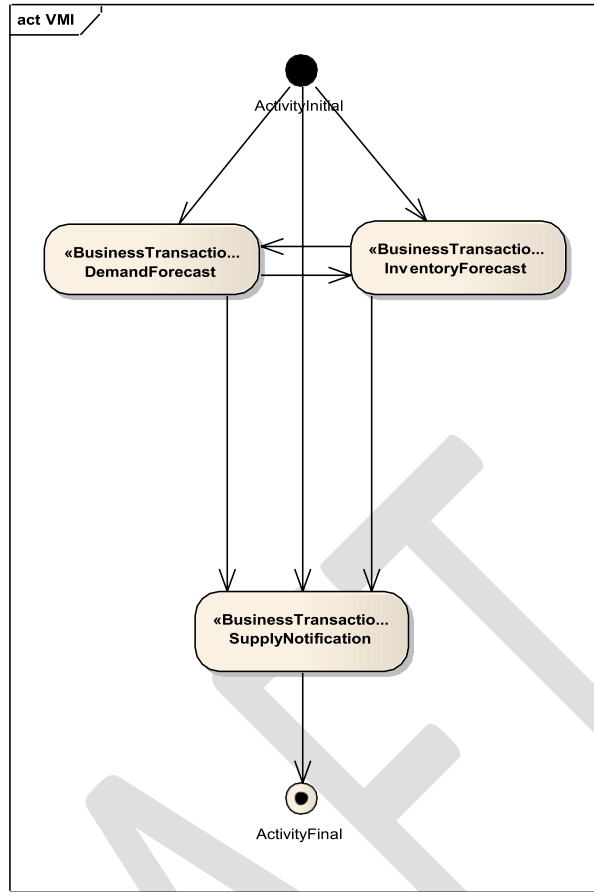


Figure 5-13 Business Collaboration Protocol - Activity Diagram

252
253
254


255 **5.2. Information Flow Definition**

256
257 **5.2.1. Demand Forecast (Business Transaction)**

258 The Demand Forecast transaction is used by the Customer to provide forecasts of demand and
259 in some cases short-term firm requirements to the Supplier. The Demand Forecasting process
260 allows both Customer and Supplier to optimise their respective production activities and
261 associated resources. A Demand Forecast is usually issued at pre-agreed frequencies (e.g.,
262 monthly, weekly) and may cover multiple time periods of variable length (e.g., day, week, month,
263 quarter, six months, a year).The Demand Forecast is intended to:

- 264 ■ Forecast future requirements,
- 265 ■ Provide the level of commitment needed to manufacture the goods or to buy the raw
266 materialneeded for the manufacturing,
- 267 ■ Possibly define short term firm requirements,
- 268 ■ Provide the information that guarantees synchronisation between the Customer and
269 theSupplier.

267
268
269
270
271
272
273

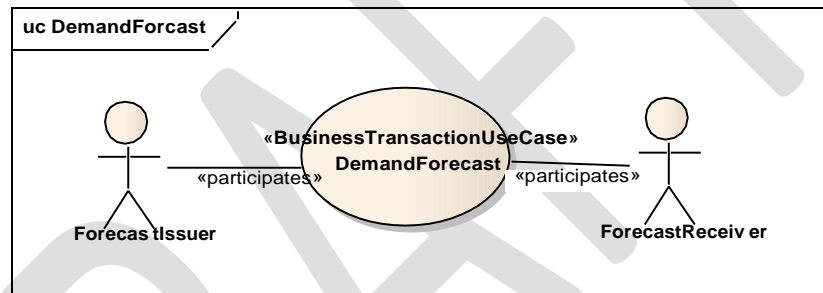

274
275 **Figure 5-14 Business Transaction Use Case Diagram**


276
277
278 **Table 5-1 Business Transaction Use Case Description**

Identifier	Demand Forecast
Business Message Type	Demand Forecast / Demand Forecast Response
Description	The Customer recognises a need to provide the Demand Forecast specifying the forecast requirements (quantities and times) with different horizons indicating various levels of commitment. The Supplier receives the Demand Forecast and if agreed between the parties he responds to the Customer.
Partner Types	Customer, Supplier
Authorized Roles	Forecast Issuer, Forecast Receiver
Legal Implications	
Initial/Terminal Events	

279

Scope	
Boundary	
Constraints	

280

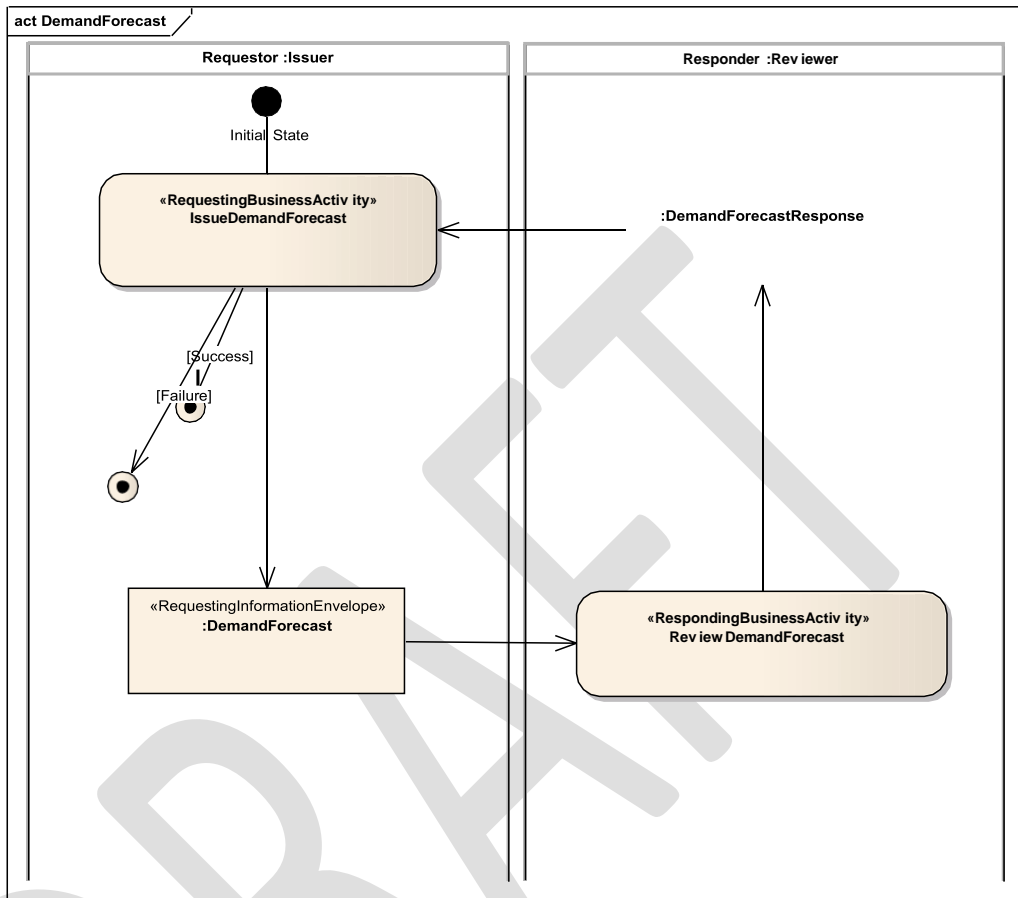

281
282

Figure 5-15 Business Transaction Activity Diagram

283
284
285
286

Principles


287
288
289
290

Depending on the validity period in the message, the information provided in the Demand Forecast can replace partly or completely the information provided in a previous Demand Forecast.

291
292
293
294

Depending on the agreement between the Customer and the Supplier, the Supplier may have the obligation to respond to a Demand Forecast with the Demand Forecast Response either in all cases, or only in the case of non-acceptance.

295
296
297


 **Note:** Guidance for the understanding of the Demand Forecast (such as commitment levels and the interaction between successive Demand Forecasts) must be provided by the Customer to the Supplier.

298 **5.2.2. Supply Instruction (Business Transaction)**

299 The supply instruction transaction is used by the Customer to provide short-term delivery
 300 instructionsto the Supplier and is usually used in conjunction with the Demand Forecast. The
 301 information provided in the Demand Forecast is in most cases generated by the production
 302 planning system of the Customer. Based on actual short-term production needs, the Customer
 303 will subsequently generate Supply Instruction messages on a more frequent basis.

304 The Supply Instruction message is intended to:

- 305 ■ specify the goods to be delivered.
- 306 ■ specify the exact delivery dates/times.
- 307 ■ specify the exact quantities.
- 308 ■ possibly provide delivery details, transport information and packaging requirements.
- 309

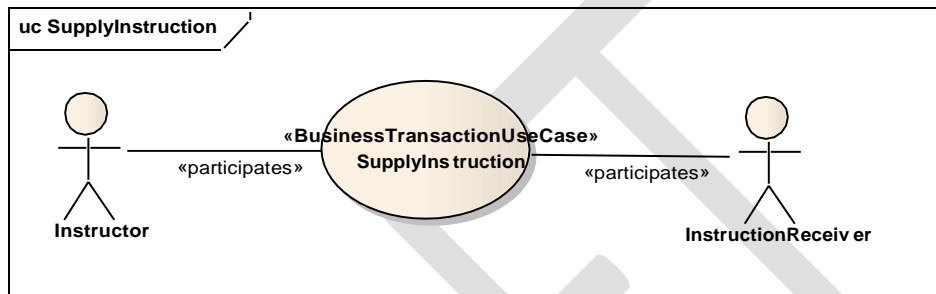

310 **Figure 5-16** Business Transaction Use Case Diagram

310
311
312
313
314
315

Table 5-2 Business Transaction Use Case Description

Identifier	Supply Instruction
Business Message Type	Supply Instruction
Description	The Customer sends the supply instruction information specifying the delivery times, quantities to be delivered, delivery details and possibly transport information and packaging requirements. The Supplier receives and processes the supply instruction message.
Partner Types	Customer, Supplier
Authorized Roles	Instructor, Instruction Receiver
Legal Implications	
Initial/Terminal Events	
Scope	
Boundary	
Constraints	If the Supplier cannot meet the requirements, the issue should be resolved outside the scope of this process.

316

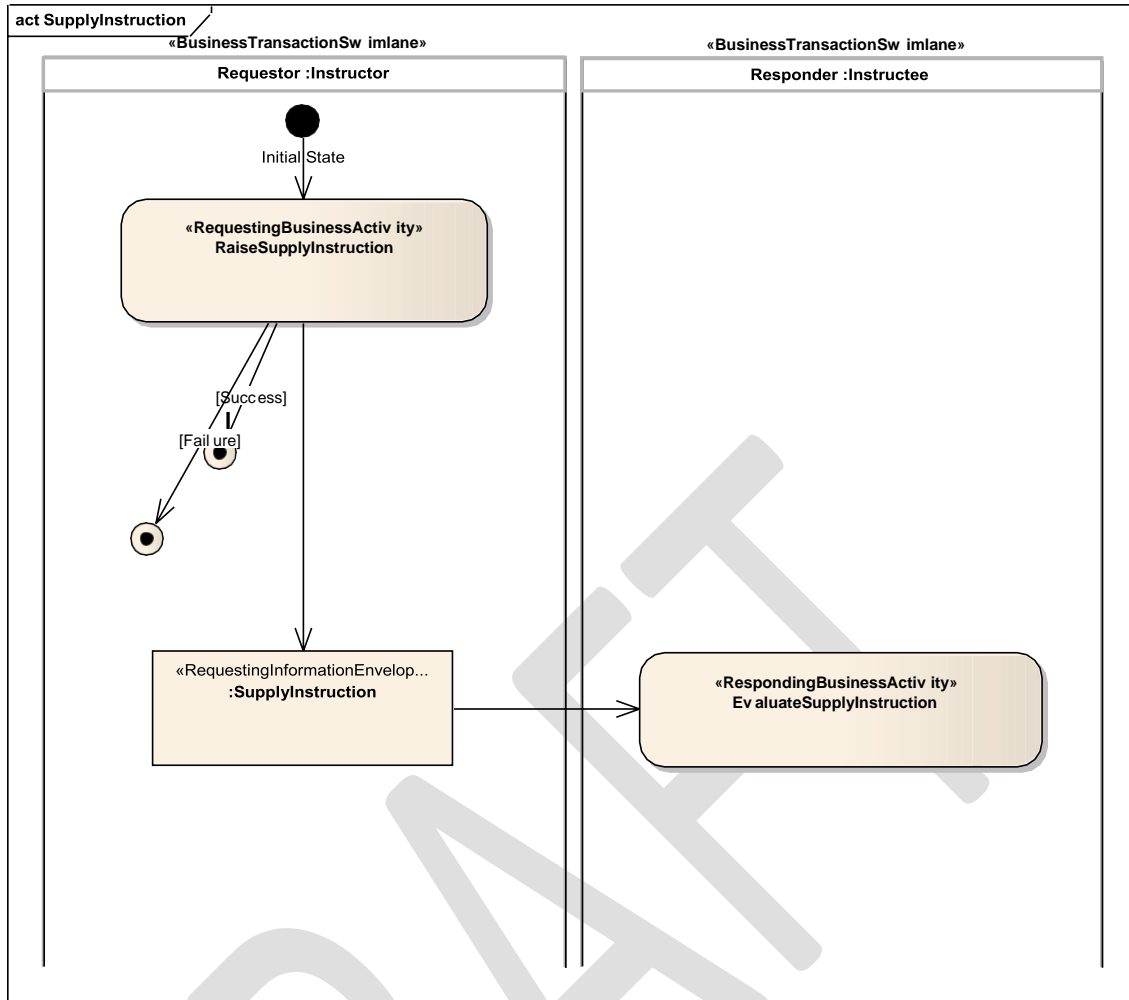


Figure 5-17 Business Transaction Activity Diagram

317

318

319

320

321

322

5.2.3. Supply Notification (Business Transaction)

323

324

The supply notification process is used by the Supplier to provide a short-term delivery plan to theCustomer.

325

The Supply Notification message is intended to:

326

- specify the goods to be delivered

327

- specify the delivery times

328

- specify the exact quantities to be delivered

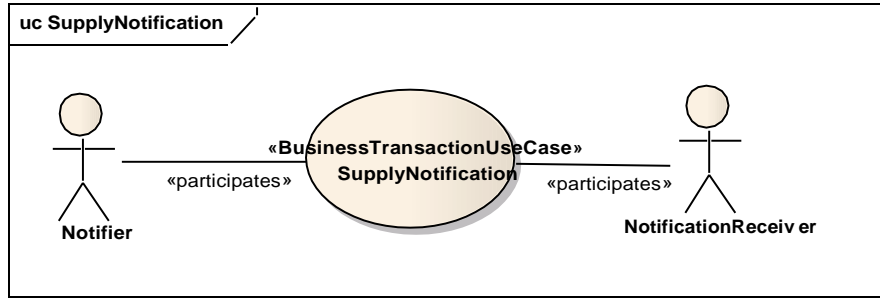


Figure 5-18 Business Transaction Use Case Diagram

329
330
331
332
333
334
335
336

Table 5-3 Business Transaction Use Case Description

Identifier	Supply Notification
Business Message Type	Supply Notification
Description	The Supplier sends the supply information specifying the delivery times and quantities to be delivered. The Customer receives and processes the Supply Notification message.
Partner Types	Customer, Supplier
Authorized Roles	Notifier, Notification Receiver
Legal Implications	
Initial/Terminal Events	
Scope	If the Customer cannot receive the notified supply, the issue should be resolved outside the scope of this process.
Boundary	
Constraints	The Supplier shall have full traceability of his Supply Notification message to make sure it has been received. Failing this technical acknowledgement, the Supplier shall re-issue his Supply Notification message

337

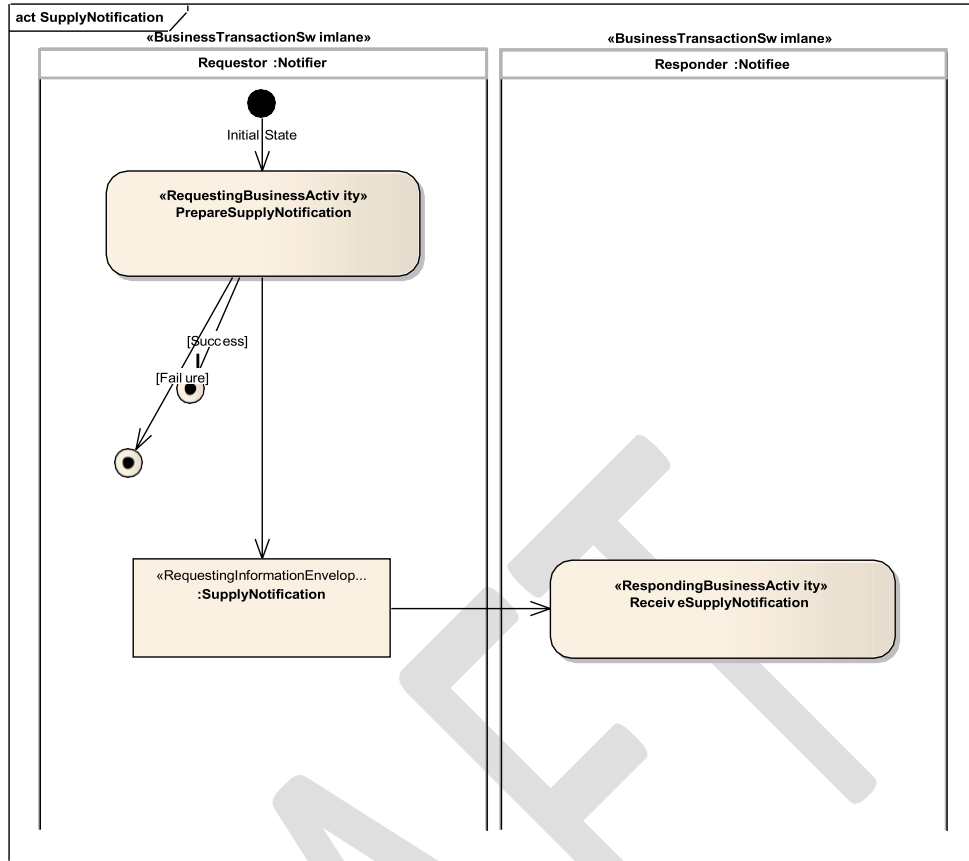


Figure 5-19 Business Transaction Activity Diagram

5.2.4. Inventory Forecast (Business Transaction)

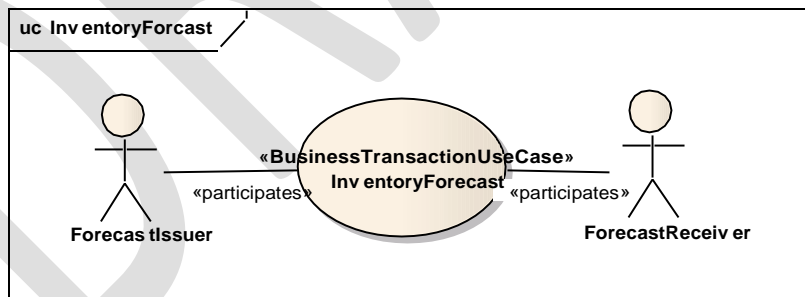


Figure 5-20 Business Transaction Use Case Diagram

338
339
340
341
342
343
344
345
346

347
348
349
350

351

Table 5-4 Business Transaction Use Case Description

Identifier	Inventory Forecast
Business Message Type	Inventory Forecast
Description	The Customer recognises a need to provide the Inventory Forecast specifying the short-term inventory forecasting, (quantities and times) and actual inventory levels. The Supplier receives the Inventory Forecast.
Partner Types	Customer, Supplier
Authorized Roles	Forecast Issuer, Forecast Receiver
Legal Implications	
Initial/Terminal Events	
Scope	Customer's purchase orders/contracts have been placed/agreed with the Supplier. Both parties have agreed to exchange the inventory forecasting. If relevant both parties have agreed on the conditions specified in a delivery or logistics agreement.
Boundary	
Constraints	The Customer shall have full traceability of his Inventory Forecast message to make sure it has been received. Failing this technical acknowledgement, the Customer shall re-issue his Inventory Forecast message.

352

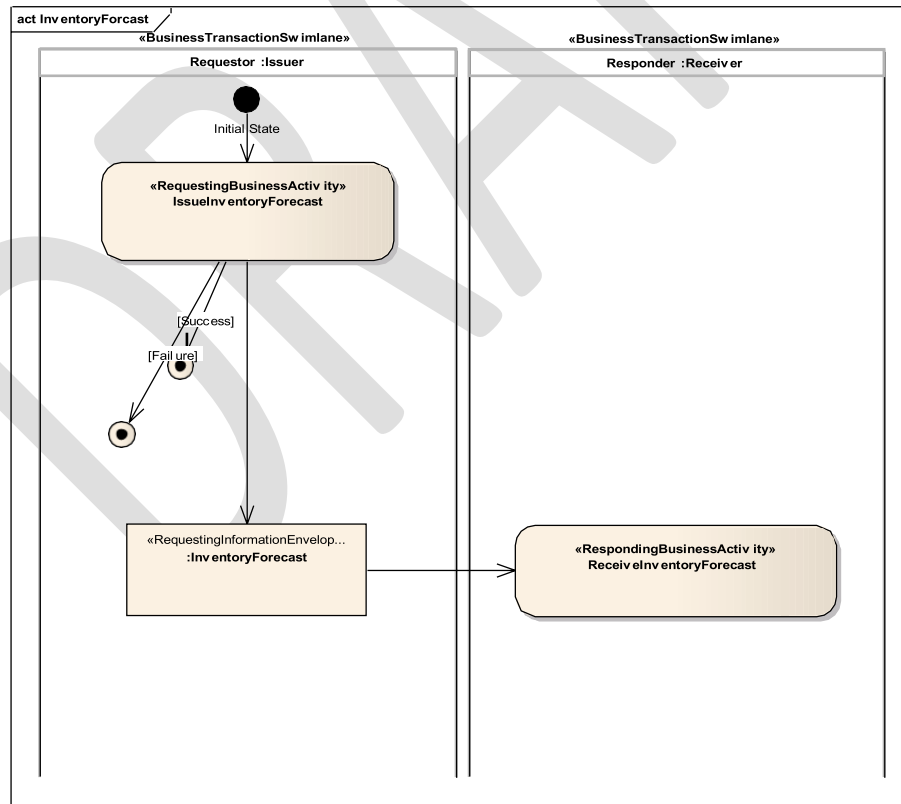


Figure 5-21 Business Transaction Activity Diagram

353
354
355
356

357
358
359
360
361
362
363
364
365
366
367
368
369
370
371


Principles

Depending on the validity period in the message, the information provided in the Inventory Forecast can replace partly or completely the information provided in a previous Inventory Forecast.

Remark:

Guidance for the understanding of the Inventory Forecast (such as the interaction between successive Inventory Forecasts) must be provided by the Customer to the Supplier.

5.2.5. Consumption Report

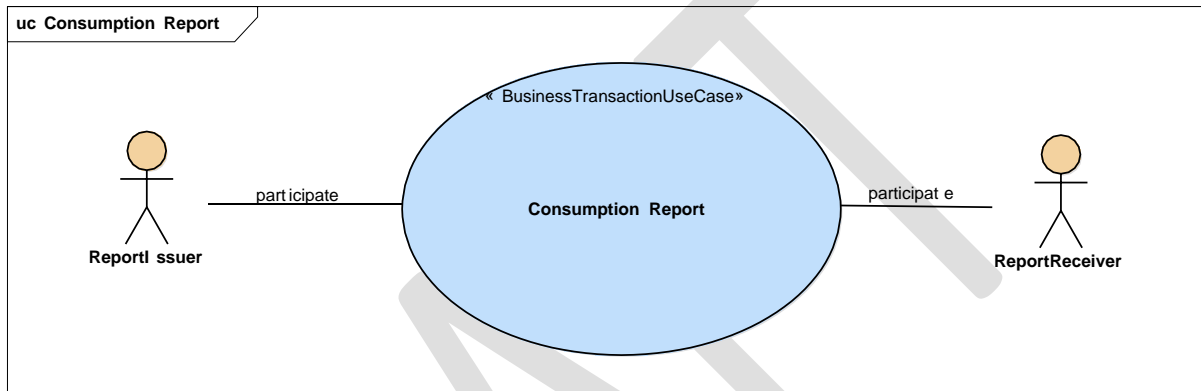

372
373
374
375
376

Figure 5-22 Business Transaction Use Case Diagram


Table 5-5 Business Transaction Use Case Description

Business Transaction Use Case Description	
Identifier	Consumption Report
Business Message Type	Consumption Report
Description	The Customer recognises a need to provide the Consumption Report specifying the Consumption of inventory, (quantities and times). The Supplier receives the Consumption Report.
Partner Types	Customer, Supplier
Authorized Roles	Report Issuer, Report Receiver
Legal Implications	
Initial/Terminal Events	
Scope	Purchase orders/contracts have been placed/agreed between Customer and Supplier. Both parties have agreed to exchange the Consumption Report.
Boundary	

378

Constraints	<p>The Customer shall have full traceability of his Consumption Report message to make sure it has been received.</p> <p>Failing this technical acknowledgement, the Customer shall re-issue his Consumption Report message.</p>
--------------------	--

379
380

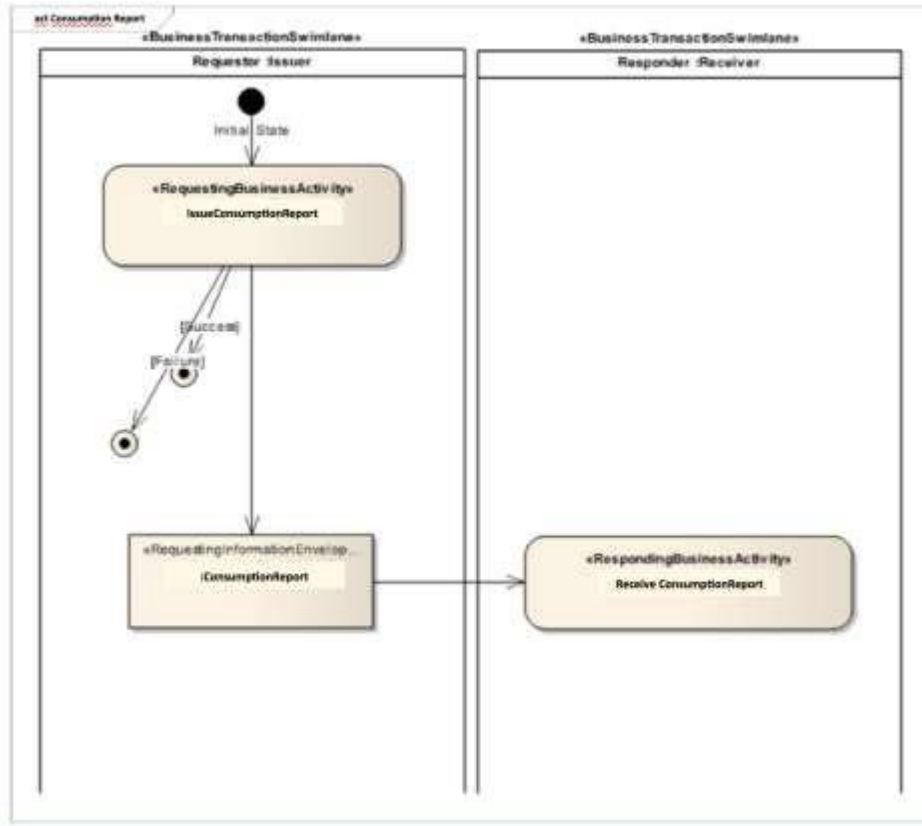

381
382
383
384
385

Figure 5-23 Business Transaction Activity Diagram

Principles

386 The invoice (or self-billing invoice) will be based on the information provided in the
387 ConsumptionReport when Consigned VMI is used between customer and supplier.

388
389
390

Remark:

391 Guidance for the understanding of the Consumption Report (such as the interaction
392 between successive Consumption Reports) must be provided by the Customer to the Supplier.

393

394 **5.3. Information Model Definition**

395

396 **5.3.1. Demand Forecast (DFO)**

397

Table 5-6 Business Requirements List

398

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
SCH	BRS			
DFO	Demand Forecast			
	(HEADER LEVEL) Forecast Message			
0001	0..1	Exchanged Document Context	The set of context parameters specified for a use of this master message assembly	(Association to)
0002	0..1	Exchanged Document	A group of trade line items, trade agreement, trade delivery and trade settlement details.	(Association to)
0003	0..1	Trade Transaction	A collection of data for a piece of written, printed or electronic matter that provides information or evidence.	(Association to)
	(Document) Exchanged Document			
0101	1	Document Information	Document ID, Issue Date Time, Document Name, Universally Unique Identifier, Revision Date, Revision Time, Index ID, Previous, Index ID, Validity Period, Copy Indicator, Note, Document Status Code, Document Language, Line Count Numeric, attachment, checksum, Control Requirement, Processing Type, Purpose	
0102	0..1	Last change date	The last date on which Demand Forecast was sent.	
0103	0..*	Line count	The total number of lines in the document	
0104	0..*	Note	Information directly relating to the identification of a note.	Note. Details CC in CCL07A
	Trade Transaction			
0201	0..1	Acknowledgment response code	Specifies the type of Response that the Buyer requires from the Seller.	"UN/CEFACT EDED D.04B - 1229 - Action request/notification description code"

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
0202	0..1	Type	The code specifying the type of trade transaction.	
0203	0..1	Urgency Status	The code specifying the status of Urgency.	
0204	0..1	Trade Agreement	Trade agreement details applicable to this trade transaction such as payment or delivery terms.	(Association to)
0205	0..*	Trade Line Item	A trade delivery header applicable to this supply chain trade transaction.	(Association to)
0206	0..1	Trade Delivery	A trade delivery header applicable to this supply chain trade transaction.	(Association to)
0207	0..*	Forecast Delivery Schedule	Delivery scheduling details for this trade transaction.	(Association to)
		Trade Agreement		
0301	0..1	Charge Free	The indication of whether or not the product is free of charge.	
0302	0..*	Customer Reference	A supplementary reference for the order expressed as text.	
0303	0..*	Reference	A reference expressed as text for this trade agreement.	
0304	0..1	Buyer	The entity contains the details of the buyer.	(Association to)
0305	0..1	Customer End User	The entity contains the details of the Customer.	(Association to)
0306	0..1	Seller	The entity contains the details of the seller.	(Association to)
0307	0..*	Additional Referenced	The unique identifier assigned to any additional document.	(Association to)
0308	0..*	Contract Referenced	(Association to Common Package) The unique identification assigned by the issuer to a commercial contract.	(Association to)
0309	0..1	Quotation Referenced	A referenced document for this trade agreement.	(Association to)
0310	0..1	Demand Forecast Referenced	The code specifying the type of the Demand Forecast. Values: Forecast : Firm and forecast	(Association to)
0311	0..*	Customer Order Referenced	A referenced document for this trade agreement.	(Association to)

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
0312	0..1	Trade Delivery Terms	The terms of delivery applicable to this trade agreement.	(Association to)
0313	0..1	Forecast	A forecast specified for or in this trade agreement.	(Association to)
Trade Line Item				
0401	1..1	Document Line Document	The document details for the trade line item	(Association to)
0402	0..1	Line Trade Agreement	The trade agreement specified for the trade line item	(Association to)
0403	0..1	Line Trade Delivery	The trade delivery specified for the trade line item	(Association to)
0404	0..*	Substituted Trade Product	A product which can substitute the initial product	(Association to)
0405	0..1	Trade Product	The product details for the trade line item	(Association to)
Line Trade Agreement				
0501	0..1	Charge Free	The indication of whether or not the product is free of charge.	
0502	0..*	Customer Reference	A supplementary reference for the order expressed as text.	
0503	0..*	Reference	A reference expressed as text for this trade agreement.	
0504	0..1	Buyer	The entity contains the details of the buyer.	(Association to)
0505	0..1	Customer End User	The entity contains the details of the Customer.	(Association to)
0506	0..1	Seller	The entity contains the details of the seller.	(Association to)
0507	0..*	Additional Referenced	The unique identifier assigned to any additional document.	(Association to)
0508	0..*	Contract Referenced	The unique identification assigned by the issuer to a commercial contract.	(Association to)
0509	0..1	Quotation Referenced	A referenced document for this trade agreement.	(Association to)

400
401

402

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
0510	0..1	Demand Forecast Referenced	The code specifying the type of the Demand Forecast. Values: Forecast : Firm and forecast	(Association to)
0511	0..*	Customer Order Referenced	A referenced document for this trade agreement.	((Association to)
0512	0..1	Trade Delivery Terms	The terms of delivery applicable to this trade agreement.	((Association to)
0514	0..1	Forecast	A forecast specified for or in this trade agreement.	(Association to)
Line Trade Delivery				
0601	0..1	Agreed	The quantity agreed for this trade delivery	
0602	0..1	Billed	The quantity billed for this trade delivery.	
0603	0..1	Despatched	The quantity despatched in this trade delivery.	
0604	0..1	Final Delivery	The indication of whether or not this trade delivery is the final delivery.	
0605	0..1	Free Goods	The quantity of free goods in this trade delivery	
0606	0..1	Package	The measure of the net weight of this trade delivery	
0607	0..1	Received Quantity Type	The code specifying the type of received quantity in this trade delivery	
0608	0..1	Partial Delivery Allowed	The indication of whether or not this trade delivery can be partially delivered.	
0609	0..1	Received	The quantity received in this trade delivery.	
0610	0..1	Requested	The quantity requested for this trade delivery.	
0611	0..1	Theoretical Weight	The measure of the Theoretical weight of this trade delivery	
0612	0..1	Total gross volume	The total gross volume.	

403

404

405

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
0613	0..1	Total gross weight	The total gross weight.	
0614	0..1	Total net volume	The total net volume.	
0615	0..1	Total net weight	The total net weight.	
0616	0..1	Product Unit	The quantity of product units in this trade delivery	
0617	0..*	Final destination	A country of final destination of this trade delivery	(Association to)
0618	0..1	Delivery	Instruction for delivery for this trade delivery	(Association to)
0619	0..*	Regulated Goods	Regulated goods information for this trade delivery	(Association to)
0620	0..*	Trade Supply Plan	A supply plan specified for this trade delivery	(Association to)
0621	0..*	Delivery Adjustment	An adjustment specified for this trade delivery	(Association to)
0622	0..1	Ship To	The entity contains the details of the ship to party.	(Association to)
0623	0..1	Ship From	The entity contains the details of the ship from party.	(Association to)
0624	0..*	Additional Referenced	A referenced document for this trade delivery	(Association to)
0625	0..*	Requested Despatch	A despatch event for this trade delivery.	(Association to)
0626	0..1	Planned Despatch	A despatch event for this trade delivery.	(Association to)
0627	0..1	Actual Despatch	A despatch event for this trade delivery.	(Association to)
0628	0..1	Planned Release	An event of release of this trade delivery.	(Association to)
0629	0..1	Actual Release	An event of release of this trade delivery.	(Association to)
0630	0..1	Actual Receipt	An event of receipt of this trade delivery.	(Association to)
0631	0..1	Requested Delivery	An event of delivery of this trade delivery.	(Association to)
0632	0..1	Planned Delivery	An event of delivery of this trade delivery.	(Association to)
0633	0..1	Actual Delivery	An event of delivery of this trade delivery.	(Association to)

408

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
Forecast Delivery Schedule				
0701	0..1	Schedule Scope	The scope of this delivery schedule	
0702	0..1	Ship To Party	The Ship To Party of this delivery schedule	(Association to)
0703	1..*	Trade Line Item	A collection of information specific to an item being used or reported on for trade purposes.	(Association to)
Trade Line Item				
801	0..*	General Description	A textual description providing general information for this trade line item.	
802	0..1	Instruction Update Action Code	A coded information on how to update the delivery schedule	
803	1..1	Trade Product	The product details for the trade line item	(Association to)
804	0..*	Package	A physical logistics package for this supply chain trade line item.	(Association to)
805	0..*	Referenced Document	A document referenced for this supply chain trade line item.	(Association to)
806	1..1	Trade Agreement		(Association to)
807	1..1	Trade Delivery		(Association to)
809	0..1	Trade Settlement		(Association to)
Trade Agreement				
901	0..1	Forecast Frequency	A code specifying a frequency in these supply chain forecast.	

409
410

411

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
902	0..*	Referenced Document	An additional document referenced in this line trade agreement.	
903	0..*	Product Net Price	A net product price in this line trade agreement.	
904	0..1	Manufacturing Party	A manufacturer party for this line trade agreement.	
Trade Delivery				
1001	0..1	Maximum stackability weight		
1002	0..*	Supply Plan	A supply plan, at line level, projected for this trade delivery.	(Association to)
1003	0..*	Related Consignment Information	A consignment, at line level, related to this line trade delivery.	(Association to)
1004	0..*	Handling Instructions	Handling instructions, at line level, specified for this trade delivery.	(Association to)
1006	0..*	Actual Despatch Event	An actual despatch event, at line level, for this trade delivery	To communicate last received shipments for accrual purposes
1007	0..*	Despatch Advice Document	The despatch advice document, at line level, referenced for this trade delivery.	(Association to)
1008	0..1	Dangerous Goods Information	The transport dangerous goods details, at line level, applicable to this trade delivery.	(Association to)
1009	0..1	Unloading Location	The unloading logistics location for this delivery.	(Association to)
1010	0..1	Loading Location	The loading logistics location for this delivery.	(Association to)

412

413

414

5.3.2. Demand Forecast Response (DFR)

415

Table 5-7 Business Requirements List

416

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
SCH	BRS			
DFR		Demand Forecast Response		
		(HEADER LEVEL) Forecast Message Response		
0001	0..1	Exchanged Document	A group of trade line items, trade agreement, trade delivery and trade settlement details.	(Association to Common Package)
0002	0..1	Trade Transaction	A collection of data for a piece of written, printed or electronic matter that provides information or evidence.	(Association to)
		(Document) Exchanged Document		
0101	1	Document Information	Document ID, Issue Date Time, Document Name, Universally Unique Identifier, Revision Date, Revision Time, Index ID, Previous, Index ID, Validity Period, Copy Indicator, Note, Document Status Code, Document Language, Line Count Numeric, attachment, checksum, Control Requirement, Processing Type, Purpose	See TRD-DOC-Doc
0102	0..1	Last change date	The last date on which Demand Forecast was sent.	Candidate for TRD-DOC
0103	0..*	Line count	The total number of lines in the document	
0104	0..*	Note	Information directly relating to the identification of a note.	Note. Details CC in CCL07A
		Trade Transaction		

417

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
0201	0..1	Acknowledgment response code	Specifies the type of Response that the Buyer requires from the Seller.	"UN/EDIFACT EDED D.04B - 1229 - Action request/notification description code"
0202	0..1	Type	The code specifying the type of trade transaction.	
0203	0..1	Urgency Status	The code specifying the status of Urgency.	
0204	0..1	Trade Agreement	Trade agreement details applicable to this trade transaction.	(Association to)
0205	0..*	Trade Line Item	A trade line item included in this trade transaction.	(Association to)
		Trade Agreement		
0301	0..1	Charge Free	The indication of whether or not the product is free of charge.	
0302	0..*	Customer Reference	A supplementary reference for the order expressed as text.	
0303	0..*	Reference	A reference expressed as text for this trade agreement.	
0304	0..1	Buyer	The entity contains the details of the buyer.	(Associated to Common)
0305	0..1	Customer End User	The entity contains the details of the Customer.	(Associated to Common)
0306	0..1	Seller	The entity contains the details of the seller.	(Associated to Common)
0307	0..*	Additional Referenced	The unique identifier assigned to any additional document.	See TRD-DOC-Doc (Associated to Common)
0308	0..*	Contract Referenced	The unique identification assigned by the issuer to a commercial contract.	See TRD-DOC-Doc (Associated to Common)
0309	0..1	Quotation Referenced	A quotation document referenced for this trade agreement.	(Associated to Common)
0310	0..1	Demand Forecast Referenced	The demand forecast document referenced for this trade agreement.	(Associated to Common)
0311	0..*	Customer Order Referenced	A customer order document referenced for this trade agreement.	(Associated to Common)
0312	0..1	Trade Delivery Terms	The terms of delivery applicable to this trade agreement.	(Associated to Common)

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
0313	0..1	Forecast	A forecast specified for or in this trade agreement.	(Associated to Common)
Trade Line Item				
0401	1..1	Document Line Document	The document details for the trade line item.	(Associated to Common)
0402	0..1	Line Trade Agreement	The trade agreement specified for the trade line item.	(Associated to Line Trade Agreement)
0403	0..1	Line Trade Delivery	The trade delivery specified for the trade line item.	(Associated to Line Trade Delivery)
0404	0..*	Substituted Trade Product	A product which is substituted for the trade line item.	(Associated to Common)
0405	0..1	Trade Product	The product details for the trade line item.	(Associated to Common)
Line Trade Agreement				
0501	0..1	Charge Free	The indication of whether or not the product is free of charge.	
0502	0..*	Customer Reference	A supplementary reference for the order expressed as text.	
0503	0..*	Reference	A reference expressed as text for this trade agreement.	
0504	0..1	Buyer	The entity contains the details of the buyer.	(Associated to Common)
0505	0..1	Customer End User	The entity contains the details of the Customer.	(Associated to Common)
0506	0..1	Seller	The entity contains the details of the seller.	(Associated to Common)
0507	0..*	Additional Referenced	A additional document referenced for the trade agreement. The unique identifier assigned to any additional document.	See TRD-DOC-Doc (Associated to Common)
0508	0..*	Contract Referenced	A contract document referenced for the trade agreement. The unique identification assigned by the issuer to a commercial contract.	See TRD-DOC-Doc (Associated to Common)
0509	0..1	Quotation Referenced	A quotation document referenced for this trade agreement.	(Associated to Common)
0510	0..1	Demand Forecast Referenced	The demand forecast document referenced for this trade agreement.	(Associated to Common)

UID	Crd	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
0511	0..*	Customer Order Referenced	A customer order document referenced for this trade agreement.	(Associated to Common)
0512	0..1	Trade Delivery Terms	The terms of delivery applicable to this trade agreement.	(Associated to Common)
0514	0..1	Forecast	A forecast specified for or in this trade agreement.	(Associated to Common)
Line Trade Delivery				
0601	0..1	Agreed	The quantity agreed for this trade delivery	
0602	0..1	Billed	The quantity billed for this trade delivery.	
0603	0..1	Despatched	The quantity despatched in this trade delivery.	
0604	0..1	Final Delivery	The indication of whether or not this trade delivery is the final delivery.	
0605	0..1	Free Goods	The quantity of free goods in this trade delivery.	
0606	0..1	Package	The measure of the net weight of this trade delivery.	
0607	0..1	Received Quantity Type	The code specifying the type of received quantity in this trade delivery.	
0608	0..1	Partial Delivery Allowed	The indication of whether or not this trade delivery can be partially delivered.	
0609	0..1	Received	The quantity received in this trade delivery.	
0610	0..1	Requested	The quantity requested for this trade delivery.	
0611	0..1	Theoretical Weight	The measure of the Theoretical weight of this trade delivery.	
0612	0..1	Total gross volume	The total gross volume.	
0613	0..1	Total gross weight	The total gross weight.	
0614	0..1	Total net volume	The total net volume.	
0615	0..1	Total net weight	The total net weight.	
0616	0..1	Product Unit	The quantity of product units in this trade delivery.	
0617	0..*	Final destination	A country of final destination of this trade delivery.	(Association to Common)

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
0618	0..1	Delivery	Instruction for delivery for this trade delivery.	(Association to Common)
0619	0..*	Regulated Goods	Regulated goods information for this trade delivery.	(Association to Common)
0620	0..*	Trade Supply Plan	A supply plan specified for this trade delivery.	(Association to Common)
0621	0..*	Delivery Adjustment	An adjustment specified for this trade delivery	(Association to Common)
0622	0..1	Ship To	The entity contains the details of the ship to party.	(Association to Common)
0623	0..1	Ship From	The entity contains the details of the ship from party.	(Association to Common)
0624	0..*	Additional Referenced	An additional document referenced for this trade delivery.	(Association to Common)
0625	0..*	Requested Despatch	A requested despatch event for this trade delivery.	(Association to Common)
0626	0..1	Planned Despatch	A planned despatch event for this trade delivery.	(Association to Common)
0627	0..1	Actual Despatch	An actual despatch event for this trade delivery.	(Association to Common)
0628	0..1	Planned Release	A planned release event for of this trade delivery.	(Association to Common)
0629	0..1	Actual Release	An actual release event for of this trade delivery.	(Association to Common)
0630	0..1	Actual Receipt	An event of actual receipt of this trade delivery.	(Association to Common)
0631	0..1	Requested Delivery	An event of requested delivery of this trade delivery.	(Association to Common)
0632	0..1	Planned Delivery	An event of planned delivery of this trade delivery.	(Association to Common)
0633	0..1	Actual Delivery	An event of actual delivery of this trade delivery.	(Association to Common)
0634	0..1	Consignment	A consignment for this trade delivery. The transport movement is specified for this consignment.	
0635	0..1	Referenced Logistics Package	A logistics package referenced for this trade delivery	

422

5.3.3. Inventory Forecast (IFO)

423

Table 5-3 Business Requirements List

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
SCH	BRS			
IFO		Inventory Forecast		
		(HEADER LEVEL) Forecast Message		
0001	0..1	Exchanged Document	A group of trade line items, trade agreement, trade delivery and trade settlement details.	(Association to Common Package)
0002	0..1	Trade Transaction	A collection of data for a piece of written, printed or electronic matter that provides information or evidence.	(Association to)
		(Document) Exchanged Document		
0101	1	Document Information	Document ID, Issue Date Time, Document Name, Universally Unique Identifier, Revision Date, Revision Time, Index ID, Previous, Index ID, Validity Period, Copy Indicator, Note, Document Status Code, Document Language, Line Count Numeric, attachment, checksum, Control Requirement, Processing Type, Purpose	See TRD-DOC-Doc
0102	0..1	Last change date	The last date on which Demand Forecast was sent.	Candidate for TRD-DOC
0103	0..*	Line count	The total number of lines in the document.	
0104	0..*	Note	Information directly relating to the identification of a note.	Note. Details CC in CCL07A
		Trade Transaction		
0201	0..1	Acknowledgment response code	Specifies the type of Response that the Buyer requires from the Seller.	"UN/EDIFACT EDED D.04B - 1229 - Action request/notification description code"
0202	0..1	Type	The code specifying the type of trade transaction.	
0203	0..1	Urgency Status	The code specifying the status of Urgency.	
0204	0..1	Trade Agreement	Trade agreement details applicable to this trade transaction such as payment or delivery terms.	(Association to)
0205	0..*	Trade Line Item	A trade line item included in this trade transaction.	(Association to)

424

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
Trade Agreement				
0301	0..1	Charge Free	The indication of whether or not the product is free of charge.	
0302	0..*	Customer Reference	A supplementary reference for the order expressed as text.	
0304	0..*	Reference	A reference expressed as text for this trade agreement.	
0305	0..1	Buyer	The entity contains the details of the buyer.	(Associated to Common)
0306	0..1	Customer End User	The entity contains the details of the Customer.	(Associated to Common)
0307	0..1	Seller	The entity contains the details of the seller.	(Associated to Common)
0308	0..*	Additional Referenced	An additional document referenced for the The trade line item. The unique identifier assigned to any additional document.	See TRD-DOC-Doc (Associated to Common)
0309	0..*	Contract Referenced	A contract document referenced for the trade line item. The unique identification assigned by the issuer to a commercial contract.	See TRD-DOC-Doc (Associated to Common)
0310	0..1	Demand Forecast Referenced	The demand forecast document referenced for this trade agreement.	(Associated to Common)
0311	0..1	Trade Delivery Terms	The terms of delivery applicable to this trade agreement.	(Associated to Common)
0312	0..1	Forecast	A forecast specified for or in this trade agreement.	(Associated to Common)
Trade Line Item				
0401	1..1	Document Line Document	The document details for the trade line item	(Associated to Common)
0402	0..1	Line Trade Agreement	The trade agreement specified for the trade line item.	(Associated to Line Trade Agreement)
0403	0..1	Line Trade Delivery	The trade delivery specified for the trade line item.	(Associated to Line Trade Delivery)
0404	0..*	Substituted Trade Product	A product which is substituted for the trade line item.	(Associated to Common)

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
0405	0..1	Trade Product	The product details for the trade line item.	(Associated to Common)
Line Trade Agreement				
0501	0..1	Charge Free	The indication of whether or not the product is free of charge.	
0502	0..*	Customer Reference	A supplementary reference for the order expressed as text.	
0503	0..*	Reference	A reference expressed as text for this trade agreement.	
0504	0..1	Buyer	The entity contains the details of the buyer.	(Associated to Common)
0505	0..1	Customer End User	The entity contains the details of the Customer.	(Associated to Common)
0506	0..1	Seller	The entity contains the details of the seller.	(Associated to Common)
0507	0..*	Additional Referenced	An additional document referenced for the trade agreement. The unique identifier assigned to any additional document.	See TRD-DOC-Doc (Associated to Common)
0508	0..*	Contract Referenced	The contract document referenced for the trade agreement. The unique identification assigned by the issuer to a commercial contract.	See TRD-DOC-Doc (Associated to Common)
0509	0..1	Demand Forecast Referenced	The demand forecast document referenced for this trade agreement.	(Associated to Common)
0510	0..1	Trade Delivery Terms	The terms of delivery applicable to this trade agreement.	(Associated to Common)
0511	0..1	Forecast	A forecast specified for or in this trade agreement.	(Associated to Common)
Line Trade Delivery				
0601	0..1	Received Quantity Type	The code specifying the type of received quantity in this trade delivery	
0602	0..1	Received	The quantity received in this trade delivery.	
0603	0..*	Final destination	A country of final destination of this trade delivery.	(Association to Common)
0604	0..1	Delivery	Instruction for delivery for this trade delivery.	(Association to Common)

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
0605	0..*	Regulated Goods	Regulated goods information for this trade delivery.	(Association to Common)
0606	1..1	Line Trade Inventory	The entity specified the projected inventory.	(Association to)
0607	0..*	Delivery Adjustment	An adjustment specified for this trade delivery.	(Association to Common)
0608	0..1	Ship To	The entity contains the details of the ship to party.	(Association to Common)
0609	0..1	Ship From	The entity contains the details of the ship from party.	(Association to Common)
0610	0..*	Additional Referenced	An additional document referenced for this trade delivery.	(Association to Common)
0611	0..1	Planned Delivery	An event of planned delivery of this trade delivery.	(Association to Common)
0612	0..1	Actual Delivery	An event of actual delivery of this trade delivery.	(Association to Common)
0613	0..1	Actual Receipt	An event of actual receipt of this trade delivery.	(Association to Common)
1..1	Line Trade Inventory			
0701	0..1	Warehouse	Description of the Warehouse the item is stored in.	
0702	0..1	Minimum stock level	The minimum level of stock of the item that must be respected.	
0703	0..1	Minimum stock	e.g. Day	
0704	0..1	Maximum stock level	The maximum level of stock of the item that may not be exceeded.	
0705	0..1	Maximum stock	e.g. Day	
0706	0..1	Actual Stock Level	The actual level of the stock.	
0707	0..1	Actual Stock Level Date Time	The date and/or time the actual stock level was measured.	
0708	0..1	Planned stock quantity	the quantity of the item advised as Inventory Reported.	
0709	0..1	Calculation date of planned stock quantity	the date of Inventory Reporting quantity.	
0710	0..*	Stocked product note	The free text information related to the stocked product.	

UID	Crd	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
0711	0..*	Supplier delivery reference	The unique identification assigned by the supplier to a delivery.	See TRD-DOC-Doc
0712	0..1	Contract reference	The unique identification assigned by the issuer to a contract.	See TRD-DOC-Doc

428
429

DRAFT

430

5.3.4. Supply Instruction (SPI)

431

Table 5-8 Business Requirements List

432

UID	Crd	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
SPI	Supply Instruction			
	(HEADER LEVEL) Supply Instruction Message			
0001	0..1	Exchanged Document Context	The set of context parameters specified for a use of this master message assembly.	(Association to)
0002	0..1	Exchanged Document	The header document information for a use of this master message assembly.	(Association to)
0003	0..1	Trade Transaction	A collection of data for a piece of written, printed or electronic matter that provides information or evidence.	(Association to)
	(Document) Exchanged Document			
0101	1	Document Information	Document ID, Issue Date Time, Document Name, Universally Unique Identifier, Revision Date, Revision Time, Index ID, Previous, Index ID, Validity Period, Copy Indicator, Note, Document Status Code, Document Language, Line Count Numeric, attachment, checksum, Control Requirement, Processing Type, Purpose	See TRD-DOC-Doc
0102	0..1	Last change date	The last date on which Demand Forecast was sent.	Candidate for TRD-DOC
0103	0..*	Line count	The total number of lines in the document	
0104	0..*	Note	Information directly relating to the identification of a note.	Note. Details CC in CCL07A
0105	0..1	Acknowledgment response code	Specifies the type of Response that the Buyer requires from the Seller.	"UN/CEFACT EDED D.04B - 1229 - Action request/notification description code"
0106	0..1	Type	The code specifying the type of trade transaction.	
0107	0..1	Urgency Status	The code specifying the status of Urgency.	

433

434

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
	Trade Transaction			
0201	0..1	Trade Agreement	Trade agreement details applicable to this trade transaction such as payment or delivery terms.	(Association to)
0202	0..*	Trade Line Item	A trade line item included in this trade transaction.	(Association to)
	Trade Agreement			
0301	0..1	Charge free indicator	The indication of whether or not the product is free of charge.	
0302	0..*	Customer Reference	A supplementary reference for the order expressed as text	
0303	0..*	Reference	A reference expressed as text for this trade agreement.	
0304	0..1	Buyer	The entity contains the details of the buyer.	(Association to)
0305	0..1	Customer End User	The entity contains the details of the Customer.	(Association to)
0306	0..1	Seller	The entity contains the details of the seller.	(Association to)
0307	0..*	Supply Notification Referenced	A referenced document for this trade agreement.	(Association to)
0308	0..1	Supply Instruction Referenced	A referenced document for this trade agreement.	(Association to)
0309	0..*	Additional Referenced	The unique identifier assigned to any additional document.	(Association to)
0310	0..*	Contract Referenced	The unique identification assigned by the issuer to a commercial contract.	(Association to)
0311	0..1	Quotation Referenced	A referenced document for this trade agreement.	(Association to)
0312	0..1	Demand Forecast Referenced	A demand forecast document referenced in this header trade agreement.	(Association to)
0313	0..*	Customer Order Referenced	A referenced document for this trade agreement.	(Association to)
0314	0..1	Trade Delivery Terms	The terms of delivery applicable to this trade agreement.	(Association to)
	Trade Line Item			
0401	0..1	Document Line Document	The document details for the trade line item	(Association to)
0402	0..1	Line Trade Agreement	The trade agreement specified for the trade line item	(Association to)

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
0403	0..1	Line Trade Delivery	The trade delivery specified for the trade line item	(Association to)
0404	0..1	Line Trade Settlement	The trade settlement specified for the trade line item.	Association to)
0405	0..*	Substituted Trade Product	A product which can substitute the initial product	(Association to)
0406	0..1	Specified Trade Product	The product details for the trade line item	(Association to)
Line Trade Agreement				
0501	0..1	Charge Free	The indication of whether or not the product is free of charge.	
0502	0..*	Customer Reference	A supplementary reference for the order expressed as text.	
0503	0..*	Reference	A reference expressed as text for this trade agreement.	
0504	0..1	Buyer	The entity contains the details of the buyer.	(Association to)
0505	0..1	Customer End User	The entity contains the details of the Customer.	(Association to)
0506	0..1	Seller	The entity contains the details of the seller.	(Association to)
0507	0..1	Manufacturer Party	A manufacturer party for this line trade agreement.	(Association to)
0508	0..*	Supply Notification Referenced	A referenced document for this trade agreement.	(Association to)
0509	0..1	Supply Instruction Referenced	A referenced document for this trade agreement.	(Association to)
0510	0..*	Additional Referenced	The unique identifier assigned to any additional document.	(Association to)
0511	0..*	Contract Referenced	(Association to Common Package) The unique identification assigned by the issuer to a commercial contract.	(Association to)
0512	0..1	Quotation Referenced	A referenced document for this trade agreement.	(Association to)
0513	0..1	Demand Forecast Referenced	The code specifying the type of the Demand Forecast. Values: Forecast : Firm and forecast	(Association to)
0514	0..*	Customer Order Referenced	A referenced document for this trade agreement.	(Association to)

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
0515	0..1	Trade Delivery Terms	The terms of delivery applicable to this trade agreement.	(Association to)
Line Trade Delivery				
0601	0..1	Agreed Quantity	The quantity agreed for this trade delivery	
0602	0..1	Billed Quantity	The quantity billed for this trade delivery.	
0603	0..1	Despatched Quantity	The quantity despatched in this trade delivery.	
0604	0..1	Final Delivery Indicator	The indication of whether or not this trade delivery is the final delivery.	
0605	0..1	Free Goods Quantity	The quantity of free goods in this trade delivery	
0607	0..1	Package Quantity	The quantity of packages in this trade delivery	
0608	0..1	Received Quantity Type	The code specifying the type of received quantity in this trade delivery	
0609	0..1	Partial Delivery Allowed Indicator	The indication of whether this trade delivery can be partially delivered.	
0610	0..1	Received Quantity	The quantity received in this trade delivery.	
0611	0..1	Requested Quantity	The quantity requested for this trade delivery.	
0612	0..1	Theoretical Weight	The measure of the Theoretical weight of this trade delivery	
0613	0..1	Total gross volume	The total gross volume.	
0614	0..1	Total gross weight	The total gross weight.	
0615	0..1	Total net volume	The total net volume.	
0616	0..1	Total net weight	The total net weight.	
0617	0..1	Product Unit	The quantity of product units in this trade delivery	
0618	0..*	Final destination	A country of final destination of this trade delivery	(Association to)
0619	0..1	Delivery	Instruction for delivery for this trade delivery	(Association to)
0620	0..*	Trade Packaging	Regulated goods information for this trade delivery	(Association to)
0621	0..*	Trade Supply Plan	A supply plan specified for this trade delivery	(Association to)
0622	0..*	Delivery Adjustment	An adjustment specified for this trade delivery	(Association to)
0623	0..1	Ship To	The entity contains the details of the ship to party.	(Association to)

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
0624	0..1	Ship From	The entity contains the details of the ship from party.	(Association to)
0625	0..*	Additional Referenced	A referenced document for this trade delivery	(Association to)
0626	0..1	Despatch Advice Referenced	A referenced document for this trade delivery.	(Association to)
0627	0..1	Receiving Advice Referenced	Receiving A referenced document for this trade delivery.	(Association to)
0628	0..*	Requested Despatch	A despatch event for this trade delivery.	(Association to)
0629	0..1	Planned Despatch	A despatch event for this trade delivery.	(Association to)
0630	0..1	Actual Despatch	A despatch event for this trade delivery.	(Association to)
0631	0..1	Planned Release	An event of release of this trade delivery.	(Association to)
0632	0..1	Actual Release	An event of release of this trade delivery.	(Association to)
0633	0..1	Actual Receipt	An event of receipt of this trade delivery.	(Association to)
0634	0..1	Requested Delivery	An event of delivery of this trade delivery.	(Association to)
0635	0..1	Planned Delivery	An event of delivery of this trade delivery.	(Association to)
0636	0..1	Actual Delivery	An event of delivery of this trade delivery.	(Association to)
0637	0..1	Logistics Identification Tag	A tag used in the scheduling system on which the information about the materials or parts that are needed is specified.	
0638	0..1	Identifier	Identifier of Logistics Identification Tag.	
0639	0..1	Layout type	Layout type code of Logistics Identification Tag.	
0640	0..1	Size	Size code of Logistics Identification Tag.	
0641	0..n	Tag Segment	Segment of Tag.	
0642	0..1	Identifier	Identifier of Tag Segment.	
0643	0..1	Pattern	Pattern code of Tag Segment.	
0644	0..n	Segment Building Block	A part composing the segment.	
0645	0..1	Identifier	Identifier of Segment BuildingBlock.	
0646	0..1	Marking Type	Marking type code of Segment Building Block.	
0647	0..1	Text	Text for Segment BuildingBlock.	

0648	0..1	Binary Object	Bar code or QR code of Segment Building Block.	
------	------	----------------------	--	--

438
439
440
441
442
443

5.3.5. Supply Notification (SPN)

Table 5-9 Business Requirements List

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
SCH	BRS			
SPN		Supply Notification		
		(HEADER LEVEL) Supply Notification Message		
0001	0..1	Exchanged Document	A group of trade line items, trade agreement, trade delivery and trade settlement details.	(Association to)

444

DRAFT

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
0002	0..1	Trade Transaction	A collection of data for a piece of written, printed or electronic matter that provides information or evidence.	(Association to)
(Document) Exchanged Document				
0101	1	Document Information	Document ID, Issue Date Time, Document Name, Universally Unique Identifier, Revision Date, Revision Time, Index ID, Previous, Index ID, Validity Period, Copy Indicator, Note, Document Status Code, Document Language, Line Count Numeric, attachment, checksum, Control Requirement, Processing Type, Purpose	
0102	0..1	Last change date	The last date on which Demand Forecast was sent.	
0103	0..*	Line count	The total number of lines in the document.	
0104	0..*	Note	Information directly relating to the identification of a note.	Note. Details CC in CCL07A
Trade Transaction				
0201	0..1	Acknowledgment response code	Specifies the type of Response that the Buyer requires from the Seller.	"UN/EDIFACT EDED D.04B - 1229 - Action request/notification description code"
0202	0..1	Type	The code specifying the type of trade transaction.	
0203	0..1	Urgency Status	The code specifying the status of Urgency.	
0204	0..1	Trade Agreement	Trade agreement details applicable to this trade transaction.	(Association to)
0205	0..*	Trade Line Item	A trade line item included in this trade transaction.	(Association to)
Trade Agreement				
0301	0..1	Charge Free	The indication of whether or not the product is free of charge.	
0302	0..*	Customer Reference	A supplementary reference for the order expressed as text.	
0303	0..*	Reference	A reference expressed as text for this trade agreement.	

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
0304	0..1	Buyer	The entity contains the details of the buyer.	(Association to)
0305	0..1	Customer End User	The entity contains the details of the Customer.	(Association to)
0306	0..1	Seller	The entity contains the details of the seller.	(Association to)
0307	0..*	Supply Notification Referenced	A supply notification document referenced for this trade agreement.	(Association to)
0308	0..1	Supply Instruction Referenced	A supply instruction document referenced for this trade agreement.	(Association to)
0309	0..*	Additional Referenced	An additional document referenced for the trade agreement. The unique identifier assigned to any additional document.	(Association to)
0310	0..*	Contract Referenced	A contract document referenced for the trade agreement. The unique identification assigned by the issuer to a commercial contract.	(Association to)
0311	0..1	Demand Forecast Referenced	The demand forecast document referenced for this trade agreement.	(Association to)
0312	0..1	Trade Delivery Terms	The terms of delivery applicable to this trade agreement.	(Association to)
		Trade Line Item		
0313	1..1	Document Line Document	The document details for the trade line item	(Association to)
0314	0..1	Line Trade Agreement	The trade agreement specified for the trade line item.	(Association to)
0315	0..1	Line Trade Delivery	The trade delivery specified for the trade line item	(Association to)
0316	0..*	Substituted Trade Product	A product which is substituted for the trade line item.	(Association to)
0317	0..1	Specified Trade Product	The product details for the trade line item.	(Association to)
		Line Trade Agreement		
0401	0..1	Charge Free	The indication of whether or not the product is free of charge.	

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
0402	0..*	Customer Reference	A supplementary reference for the order expressed as text.	
0403	0..*	Reference	A reference expressed as text for this trade agreement.	
0404	0..1	Buyer	The entity contains the details of the buyer.	(Association to)
0405	0..1	Customer End User	The entity contains the details of the Customer.	(Association to)
0406	0..1	Seller	The entity contains the details of the seller.	(Association to)
0407	0..*	Supply Notification Referenced	A supply notification document referenced for this trade agreement.	(Association to)
0408	0..1	Supply Instruction Referenced	A supply instruction document referenced for this trade agreement.	(Association to)
0409	0..*	Additional Referenced	An additional document referenced for the trade agreement. The unique identifier assigned to any additional document.	(Association to)
0410	0..*	Contract Referenced	A contract document referenced for the trade agreement. The unique identification assigned by the issuer to a commercial contract.	(Association to)
0411	0..1	Demand Forecast Referenced	The demand forecast document referenced for this trade agreement.	(Association to)
0412	0..1	Trade Delivery Terms	The terms of delivery applicable to this trade agreement.	(Association to)
		Line Trade Delivery		
0501	0..1	Despatched	The quantity despatched in this trade delivery.	
0502	0..1	Final Delivery	The indication of whether or not this trade delivery is the final delivery.	
0503	0..1	Package	The quantity of packages in this trade delivery.	
0504	0..1	Theoretical Weight	The measure of the Theoretical weight of this trade delivery.	
0505	0..1	Total gross volume	The total gross volume.	

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
0506	0..1	Total gross weight	The total gross weight.	
0507	0..1	Total net volume	The total net volume.	
0508	0..1	Total net weight	The total net weight.	
0509	0..1	Product Unit	The quantity of product units in this trade delivery.	
0510	0..*	Final destination	A country of final destination of this trade delivery.	(Association to)
0511	0..1	Delivery	Instruction for delivery for this trade delivery.	(Association to)
0512	0..*	Trade Packaging	Packaging information for this trade delivery.	(Association to)
0513	1..1	Line Trade Inventory	The entity specified the projected inventory.	(Association to)
0514	0..*	Delivery Adjustment	An adjustment specified for this trade delivery.	(Association to)
0515	0..1	Ship To	The entity contains the details of the ship to party.	(Association to)
0516	0..1	Ship From	The entity contains the details of the ship from party.	(Association to)
0517	0..*	Additional Referenced	An additional document referenced for this trade delivery.	(Association to)
0518	0..1	Despatch Advice Referenced	A despatch advice document referenced for this trade delivery.	(Association to)
0519	0..1	Receiving Advice Referenced	A receiving advice document referenced for this trade delivery.	(Association to)
0520	0..1	Planned Delivery	An event of planned delivery of this trade delivery.	

448

449

450

451

5.3.6. Consumption Report (CR)

452

Table 5-10 Business Requirements List

453

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
SCH	BRS			
CR		Consumption Report		
		(HEADER LEVEL) Consumption Report Message		

454

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
0001	0..1	Exchanged Document	A group of trade line items, trade agreement, trade delivery and trade settlement details.	(Association to)
0002	0..1	Trade Transaction	A collection of data for a piece of written, printed or electronic matter that provides information or evidence.	(Association to)
(Document) Exchanged Document				
0101	1	Document Information	Document ID, Issue Date Time, Document Name, Universally Unique Identifier, Revision Date, Revision Time, Index ID, Previous, Index ID, Validity Period, Copy Indicator, Note, Document Status Code, Document Language, Line Count Numeric, attachment, checksum, Control Requirement, Processing Type, Purpose	
0102	0..1	Last change date	The last date on which Consumption Report was sent.	
0103	0..*	Line count	The total number of lines in the document.	
0104	0..*	Note	Information directly relating to the identification of a note.	Note. Details CC in CCL07A
Trade Transaction				
0201	0..1	Acknowledgment response code	Specifies the type of Response that the Buyer requires from the Seller.	"UN/EDIFACT EDED D.04B - 1229 - Action request/notification description code"
0202	0..1	Type	The code specifying the type of trade transaction.	
0203	0..1	Urgency Status	The code specifying the status of Urgency.	
0204	0..1	Trade Agreement	Trade agreement details applicable to this trade transaction.	(Association to)
0205	0..*	Trade Delivery	Trade delivery details applicable to this trade transaction.	(Association to)
0206	0..1	Trade Settlement	Trade settlement details applicable to this trade transaction.	(Association to)
0207	0..*	Trade Line Item	A trade line item included in this trade transaction.	(Association to)
Trade Agreement				

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
0301	0..1	Charge Free	The indication of whether or not the product is free of charge.	
0302	0..*	Customer Reference	A supplementary reference for the order expressed as text.	
0303	0..*	Reference	A reference expressed as text for this trade agreement.	
0304	0..1	Buyer	The entity contains the details of the buyer.	(Association to)
0305	0..1	Customer End User	The entity contains the details of the Customer.	(Association to)
0306	0..1	Seller	The entity contains the details of the seller.	(Association to)
0307	0..*	Supply Notification Referenced	A supply notification document referenced for this trade agreement.	(Association to)
0308	0..1	Supply Instruction Referenced	A supply instruction document referenced for this trade agreement.	(Association to)
0309	0..*	Additional Referenced	An additional document referenced for the trade agreement. The unique identifier assigned to any additional document.	(Association to)
0310	0..*	Contract Referenced	A contract document referenced for the trade agreement. The unique identification assigned by the issuer to a commercial contract.	(Association to)
0311	0..1	Quotation Referenced	A quotation document referenced for this trade agreement.	(Association to)
0312	0..1	Demand Forecast Referenced	The demand forecast document referenced for this trade agreement.	(Association to)
0313	0..*	Customer Order Referenced	A customer order document referenced for this trade agreement.	(Association to)
0314	0..1	Trade Delivery Terms	The terms of delivery applicable to this trade agreement.	(Association to)
	Trade Line Item			
0401	1..1	Document Line Document	The document details for the trade line item	(Association to)

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
0402	0..1	Line Trade Agreement	The trade agreement specified for the trade line item.	(Association to)
0403	0..1	Line Trade Delivery	The trade delivery specified for the trade line item	(Association to)
0405	0..1	Specified Trade Product	The product details for the trade line item.	(Association to)
	0..*	Logistics_Package	Identification of Package, Physical information as measure and Weight, details of contents as Item quantities, Numeric sequence, identifier and series identifiers and free Text	(Association to)
Line Trade Agreement				
0501	0..1	Charge Free	The indication of whether or not the product is free of charge.	
0502	0..*	Customer Reference	A supplementary reference for the order expressed as text.	
0503	0..*	Reference	A reference expressed as text for this trade agreement.	
0504	0..1	Buyer	The entity contains the details of the buyer.	(Association to)
0505	0..1	Customer End User	The entity contains the details of the Customer.	(Association to)
0506	0..1	Seller	The entity contains the details of the seller.	(Association to)
0507	0..*	Supply Notification Referenced	A supply notification document referenced for this trade agreement.	(Association to)
0508	0..1	Consumption Report Referenced	A consumption report referenced for this trade agreement.	(Association to)
0509	0..*	Additional Referenced	An additional document referenced for the trade agreement. The unique identifier assigned to any additional document.	(Association to)
0510	0..*	Contract Referenced	A contract document referenced for the trade agreement. The unique identification assigned by the issuer to a commercial contract.	(Association to)

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
0511	0..1	Quotation Referenced	A quotation document referenced for this trade agreement.	(Association to)
0512	0..1	Demand Forecast Referenced	The demand forecast document referenced for this trade agreement.	(Association to)
0513	0..*	Customer Order Referenced	A customer order document referenced for this trade agreement.	(Association to)
0514	0..1	Trade Delivery Terms	The terms of delivery applicable to this trade agreement.	(Association to)
Line Trade Delivery				
0601	0..1	Agreed	The quantity agreed for this trade delivery	
0602	0..1	Billed	The quantity billed for this trade delivery.	
0603	0..1	Despatched	The quantity despatched in this trade delivery.	
0604	0..1	Final Delivery	The indication of whether or not this trade delivery is the final delivery.	
0605	0..1	Free Goods	The quantity of free goods in this trade delivery.	
0607	0..1	Package	The quantity of packages in this trade delivery.	
0608	0..1	Received Quantity Type	The code specifying the type of received quantity in this trade delivery.	
0609	0..1	Partial Delivery Allowed	The indication of whether or not this trade delivery can be partially delivered.	
0610	0..1	Received	The quantity received in this trade delivery.	
0611	0..1	Requested	The quantity requested for this trade delivery.	
0612	0..1	Theoretical Weight	The measure of the Theoretical weight of this trade delivery.	
0613	0..1	Total gross volume	The total gross volume.	
0614	0..1	Total gross weight	The total gross weight.	
0615	0..1	Total net volume	The total net volume.	
0616	0..1	Total net weight	The total net weight.	
0617	0..1	Product Unit	The quantity of product units in this trade delivery.	

UID	Crđ	Short Name	Business Requirement	Rationale / Example / Mapping Notes / Status
0618	0..*	Final destination	A country of final destination of this trade delivery.	(Association to)
0619	0..1	Delivery	Instruction for delivery for this trade delivery.	(Association to)
0620	0..*	Trade Packaging	Packaging information for this trade delivery.	(Association to)
0621	0..*	Trade Supply Plan	A supply plan specified for this trade delivery.	(Association to)
0622	0..*	Delivery Adjustment	An adjustment specified for this trade delivery.	(Association to)
0623	0..1	Ship To	The entity contains the details of the ship to party.	(Association to)
0624	0..1	Ship From	The entity contains the details of the ship from party.	(Association to)
0625	0..*	Additional Referenced	An additional document referenced for this trade delivery	(Association to)
0626	0..1	Despatch Advice Referenced	A despatch advice document referenced for this trade delivery.	(Association to)
0627	0..1	Receiving Advice Referenced	A receiving advice document referenced for this trade delivery.	(Association to)
0628	0..*	Requested Despatch	A requested despatch event for this trade delivery.	(Association to)
0629	0..1	Planned Despatch	A planned despatch event for this trade delivery.	(Association to)
0630	0..1	Actual Despatch	An actual despatch event for this trade delivery.	(Association to)
0631	0..1	Planned Release	A planned release event for of this trade delivery.	(Association to)
0632	0..1	Actual Release	An actual release event for of this trade delivery.	(Association to)
0633	0..1	Actual Receipt	An event of actual receipt of this trade delivery.	(Association to)
0634	0..1	Requested Delivery	An event of requested delivery of this trade delivery.	(Association to)
0635	0..1	Planned Delivery	An event of planned delivery of this trade delivery.	(Association to)
0636	0..1	Actual Delivery	An event of actual delivery of this trade delivery.	(Association to)
	Supply Chain Schedule			
0637	0..1	Consumption	The quantity consumed by the customer and the date of consumption.	(Association to Common)

460
461

462 **5.4. Business Rules**

463 n/a

464
465 **5.5. Definition of Terms**

466 Regarding the Definition of Terms refer to TBG1 Common Supply Chain BRS

DRAFT